



Publication number : **0 533 585 A1**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number : **92402578.6**

(51) Int. Cl.⁵ : **A61N 5/06**

(22) Date of filing : **18.09.92**

(30) Priority : **19.09.91 CN 91109014**

(43) Date of publication of application :
24.03.93 Bulletin 93/12

(84) Designated Contracting States :
DE FR GB IT NL SE

(71) Applicant : **Zhou, Lin**
Room 232, No.2, Huashanxiang, Wuchenglu
Kunming, Yunnan Province (CN)

(72) Inventor : **Zhou, Lin**
Room 232, No.2, Huashanxiang, Wuchenglu
Kunming, Yunnan Province (CN)

(74) Representative : **Chauchard, Robert et al**
c/o Cabinet Malémont 42, avenue du Président
Wilson
F-75116 Paris (FR)

(54) **Method and apparatus for regulating and improving the status of development and survival of living organisms.**

(57) A method and apparatus utilizing the action of simulated bio-frequency spectrum signals generated upon human beings, animals, plants, and micro-organisms to regulate and improve the status of growth and survival of said organisms.

The simulated bio-frequency spectrum signals are generated through the excitation of one or a plurality of chemical elements and their compounds contained in the simulated bio-frequency spectrum signal generator by certain form of energy. Said simulated bio-frequency spectrum signals are broad band signals with wavelengths ranging from micrometers to centimeters. Said signals act upon certain sites of the organisms, elicit transition of the atoms, molecules, and electrons in the body of the organism and cause resonances, thereby the aim of regulating and improving the status of growth of the organism is achieved.

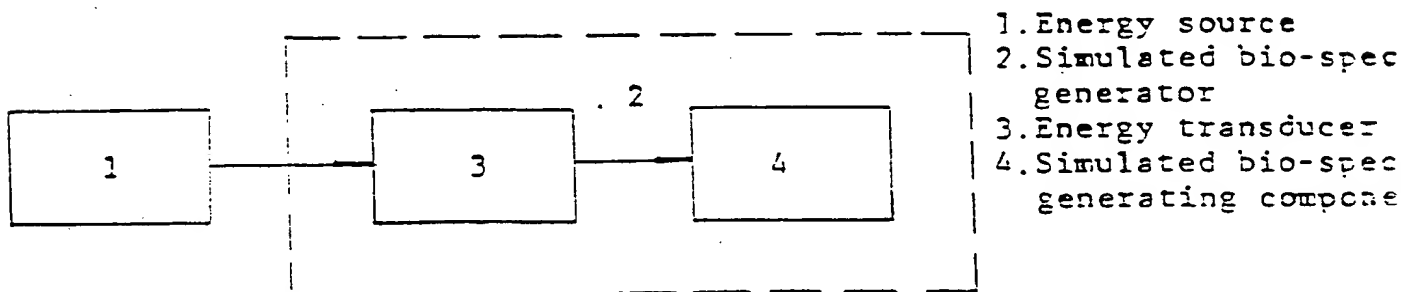


Fig. 3

EP 0 533 585 A1

Field of the Invention

The present invention relates to a method and apparatus for regulating and improving the status of development and survival of human beings, animals, plants, and micro-organisms, by means of simulated or partially simulated bio-frequency spectrum signals.

Background of the Invention

Modern sciences developed by scientists represented by Isaac Newton have made great contributions to man's understanding of the non-living world. The living world, however, remains to be explored yet. Reductionism holds that the structure and function of large molecules that determine the vital activity is finally reduced to the physical activities of the elementary particles. The discovery of the double spiral of DNA and the study of genetic code well support the reductionism. Vitalism holds that there exist essential differences between living and non-living, and that the vital and independent rules of the vital activity are different from the conventional by systematology, cybernetics, and information theory. A great amount of research work has been done under the guidance of these two kinds of important theories, but a method for effectively regulating and improving the status of development and survival of living organisms has not been found.

The inventor holds that in the non-linear system of life, the nature and status of the isolated individual units due to the decomposition of systems are different from that of the units in an unified system. However, this does not mean the vital activity has nothing to do with the physical and chemical activities. It is known that all things consist of substances, energy, and information. The function of information is particularly important in metabolism, replication, and regulation of living organisms (such as the functions of the genes). The essential difference between living and non-living things is that in living organisms there exists changing information which controls the process and development of life, and represents the normal or abnormal status of the organisms.

Living organisms have unique physical and chemical properties. People know very little about the life information expressed mainly in physical form. According to physical theories, the elementary particles such as molecules, atoms, and electrons are always vibrating and rotating even in their elementary status. Living things are composed of molecules which rotate periodically, and electrons moving surrounding the atoms, while atoms or atom groups are vibrating. These activities form various energy levels and quantizations. The normal state energy of a molecule comprises the following energies.

$$E = E_o + E_n + E_r + E_v + E_e \quad (1 - 1)$$

wherein the energy changes related to the frequency spectrum of radiation of substances are: transitional energy of outer electrons of the nucleus, E_e , rotational energy of the molecule, E_r , energy of vibration of the atom, E_v . The corresponding ranges of these three kinds of energy levels are: 1-20ev, 0.05-1ev, and 0.0035-0.05ev, respectively.

Molecules, atoms, and electrons constituting the substances radiate energies in the form of electromagnetic frequency spectrum only during transitions of their energy levels. When the status of a living being changes, the radiant energy and frequency spectrum will change therewith, e.g. cytomembrane potential electrocardiogram or electromyogram will change.

Molecules, atoms, or electrons have their own inherent frequencies. When they are subject to electromagnetic radiation of certain number of vibrations,

$$V = N/C \quad (1 - 2)$$

where V is the number of vibration, N is the frequency, and C is the velocity of light. If the applied electromagnetic frequency is equal to the inherent frequency of the molecules, atoms, or electrons, a condition same as that of resonance in the case of vibration will occur; the molecules, atoms, or electrons will absorb energy and transitions of energy levels can be elicited.

Bohr's quantum condition should be satisfied when molecules, atoms, or electrons transit from one energy level to another through the absorption of energy:

$$E_m - E_n = nV_{mn} \quad (1 - 3)$$

where E_m and E_n are high and low energy levels respectively. V_{mn} is the number of electromagnetic vibration.

Molecules, atoms, or electrons cannot absorb the electromagnetically radiated energy having the number of vibration V_{mn} if equation (1-3) is not satisfied. Since the energy levels of molecules, atoms and electrons are different and the number of vibrations are different too, the condition of transitions of energy levels due to the external electromagnetic radiation may be very complicated. The energy absorption will depend not only on the energy of the electromagnetic radiation but also on the wave number of the electromagnetic wave.

Living substances are also composed of molecules, but are more complicated in terms of energy status and structure thereof. It has been found that a living organism is a good natural source of radiation. For ex-

ample, 45% of the energy of a human body is dissipated in the form of radiant energy. When the temperature of the human body is 37°C, the maximum radiation is deduced from Wien's Displacement Law.

$$\lambda_{\text{max}} = \frac{2879}{310} = 9.35 \mu\text{m}$$

5 The inventor found through experiments that the band of human frequency spectrum is extremely broad; signals may appear in a band expanding from micrometers (μm) through millimeters (mm), and including, the near infrared, middle infrared, far infrared, and even millimeter waves. Experiments show that the human body is a comprehensive physical field, including magnetic field, infrared radiations, and weak microwaves (mainly millimeter waves). The inventor holds that using "human spectrum" (Fig. 1, curve A) and according to Kirchhoff's Law, it can be found the absorption spectrum and radiation spectrum are essentially the same. That is to say, the living organisms possess a physical field having certain frequencies and a spectrum which is called by the inventor "bio-frequency spectrum" or "bio-spectrum."

10 A part of the biospectrum is caused by light radiation of the living organisms, this is the process that chemical energy is effectively transformed into light energy by the organisms. Light radiation by the living organisms may also be called bio-luminescence which is a special case of chemical luminescence. The efficiency of bio-luminescence is very high, i.e. the heat production is very low, so it is commonly called "cold light." Living organisms have to acquire energy through the oxidation of certain easily oxidizable substances to maintain its life. Radicals containing oxygen, for example, OH, may also be utilized to oxidize hard oxidizable hydrocarbons, and biological chemoluminescence can be generated by certain reactions in that process. From microbes to human beings, all living organisms luminesce at a low level. The spectrum is from 180 to 800 nm, the intensity falls into the range of 10^{-10} - 10^{-4} nv/s.cm, and the quanta produced is only 10^{-14} - 10^{-19} . This kind of luminescence is linked with a number of biological processes such as oxidizing metabolism, detoxication, division and death of cells, photosynthesis, growth regulation, etc. Firefly luminescence is a kind of sex signal containing many detailed structures corresponding to ciphers. The female fly can respond within two seconds after the luminescence of a male fly. Photographs of human luminescence can be taken. A normal human body luminesces mainly from the head; the color of the luminescence is orange-red tinted with a little bluish-green. Red light is emitted from all over the body of a man who is getting angry and forms a thick halo. The inventor thinks that this is due to leakage of the internal energy of the body. When the angry man is irradiated for 15 minutes with the apparatus of the present invention, he will feel relaxed and the anger is relieved. At this time the red light around the body disappears from the photograph, and the status of normal luminescence is resumed.

30 Cells of the organism can be affected by spectral radiation. Organic molecules generally absorb light with wavelength longer than 200nm, because the energy of the electrons of these molecules is no more than 140 Kcal/mol higher than that of the ground state electrons. Carotinoids absorb light with 450nm wavelength, while purine compounds absorb light with 600nm wavelength light with 254nm wavelength of a flux of 10^8 photon/cm² /s has been used to enhance glycolysis in yeast. Light with 80nm wavelength of a flux of 10^5 - 10^6 photon/cm² /s can accelerate the germination of the synchronous yeast cultures.

It can be seen from the above that effects of bio-luminescence, bio-spectrum, and light radiation of various wavelengths on living organisms are obvious. However, conventional studies are still at a low level of understanding said effects and only touch on a very narrow spectral range or a single kind of radiation.

40 The present invention is capable of regulating and improving growth of the living organism. As an example, when a human body is irradiated with the apparatus, the following regulative effects are produced.

1. Elongation of blood coagulation time and the decrease of blood viscosity at the same time can activate factor 10; the increase of prothrombine activity and the activation of factor 8 at the same time can improve blood circulation, stop bleeding, relieve pain in wounds, eliminate and cure inflammation.
- 45 2. Immunological reactions can be changed and phagocytosis function is enhanced, marked increase of total number of white cells and lymphocytes in peripheral circulation is achieved, elimination of swelling is better than that in the control group ($P < 0.01$).
3. Certain effects in stimulating the appetite, enhancing the development of the organism, decreasing load on the heart, and the aggregation of blood platelets are achieved.
- 50 4. Local hypersensitivity and abnormal feeling caused by damage to the related peripheral nerves are eliminated. Conduction of action potential of the nerves is partly recovered.
5. The apparatus has no direct germicidal effects on isolated bacteria, but effects on the suppurative lesion and dermal ulcer caused by bacterial infection have been demonstrated in rabbits.
6. The present invention can cause the flowability increase of erythrocyte electrophoretic migration rate and morphotropism of red cell membrane, decrease of cell aggregation, which are advantageous to the improvement of rheology of blood and microcirculation.
7. In diabetic rabbit model prepared with tetraoxy pyrimidine, after 1-2 courses of treatment (ten days/course) with the apparatus, the fasting blood-glucose concentration is decreased remarkably and

the sugar tolerance curve shifts downwardly.

8. In experiments with a cerebral chemic mice model, the animals in a control group survived for 21.7 hours, while animals treated with the apparatus survived for 41 hours. Symptoms of cerebral ischemia were also milder in the treated group.

9. When patients of disorder in the cervical vertebrane were irradiated with the apparatus, it is found through examination of nail fold microcirculation that the number of capillaries in the nail fold increased, the bore of blood vessels were dilated, and blood flow was accelerated after 10 treatments. The improvement is significant ($P < 0.001$) as compared with conditions before treatment.

10. The apparatus according to the invention is proven to have no deforming effects on mice chromosomes through examination of bone marrow smear.

11. The apparatus according to the invention can enhance growth of microorganisms.

12. The apparatus according to the invention can protect from harmful irradiation.

13. The apparatus according to the invention can slow down aging process.

Summarizing the above mentioned experiments and research, the regulative and improving function of simulated bio-spectrum on status of growth of human body can be briefly described as follows:

(1) It makes cells and tissues acquire energy and causes favorable changes in temperature, cell permeability, colloid status, flow rate of body fluid, acidity (pH value), enzyme system and bio-electricity.

(2) It helps in improving and regulating the nervous system through the excitation by the simulated spectral energy. The sequence is: spectral energy --> receptor --> afferent nerve --> nerve center --> efferent nerve --> effector. Regulative reflex arcs are thus formed to maintain biological balance of the human body, and to eliminate diseases and enhance health. Since it functions through reflex of the nervous system, the apparatus can be placed at a distance from the site of the lesion and results in therapeutic effects on the whole body.

(3) The organism can produce certain metabolites and endocrine secretions by the stimulation of simulated human spectral energy. These metabolites and endocrine secretions are conveyed by the body fluid and act on various organs and systems to produce certain physiological regulative reactions and achieve therapeutic effects.

(4) After the nerve is stimulated by the physical field of the simulated bio-spectrum, blood and lymphatic circulations are accelerated, cell vitality and functions of organ systems are enhanced. Thus, the cell and humeral immunities are significantly enhanced.

(5) The signals of the physical field of the simulated bio-spectrum activate regulation of the nervous system, improve body fluid circulation, increase volume of blood vessels, accelerate blood flow, improve blood supply to the heart, enhance peristalsis of stomach and intestine and of body of gland, thus enhance the absorption by the digestive tract and maintains optimal function thereof.

(6) The signals of the physical field of the simulated bio-spectrum stimulate nerves and body fluid to keep physiological balance of the human body through negative feedback and automatically perform the regulative function so that the important physiological indices of human body (such as blood pressure, blood glucose, pH value, blood fat, membrane potentials of organs or cells) are controlled within normal range. Antagonistic symptoms like constipation and diarrhea, bleeding and hemostasis are also improved through the action of negative feedback.

In summary, the present invention can perform at least four distinct functions:

(1) Improving circulation of body fluid;

(2) Regulating nervous system;

(3) Immunological function;

(4) Bio-negative feedback (bilateral regulation).

As human beings are concerned, the above four functions of the invention are sufficient to improve the status of growth, to treat many kinds of diseases and to maintain good health to certain extents. The same functions can also be applied to other species of living beings.

In addition, it has been discovered that the method and apparatus using simulated bio-spectrum can also be applied in biofeedback and the field of oriental traditional medicine.

1. Application in the field of chinese acupuncture and Jing-Luo (main collateral channels).

The method using simulated bio-spectrum is capable of making "Qi" and "blood" flow freely as well as the main and collateral channels unblock (corresponding to the improvements of the regulation of nerves and circulation in western medicine) to achieve the function of regulation and treatment in a manner that the apparatus of the present invention is used to directly irradiate the traditional acupoints, or a large area of the human body. The results are at least similar to those of other oriental traditional methods such as acupuncture and

massage.

2. Application in "Qi-Gong" and "Yuga"

Since the function of the present invention is to cause resonating transition of the energy levels of the molecules, atoms, and electrons in the human body, the resonance excited through the acquisition of energy by the cell system reacts on tissues, organs, systems, body fluids, and nerves, and form: a channel for information flow mainly in the form of sensory conduction. If trained with subconsciousness (practicing Yuga or biofeedback), curious sensations of soreness, numbness, fullness, hotness or out crawling can appear at certain parts of the body. These changes can be detected with infrared spectrophotometry. The method of the present invention is applicable in the practice and research of "Qi-Gong" and "Yuga" for information therapy and health maintenance.

The present invention will help in making the exploration of oriental spirit, system, information, and "Qi-Gong" more scientific and standardized.

3. Application in the practice and training of biofeedback.

The principles of the invention can be used in biofeedback practice and training which helps the patients mobilize their intrinsic potentials, substantiate the content of psychotherapy, treat psychosomatic diseases and train the handicapped extremities.

Up to the present, efforts have been made to control or effect the status of growth and to treat diseases of living beings by means of physical method such as electrotherapy, ultrasound, infrared light, ultraviolet light, microwave and laser which treat diseases with different physical factors, but all of these physical means are operating in a single or very narrow range of spectrum, and only resulting in the transition of energy levels in either molecules or atoms or electrons. Although these physical means may produce certain effect in the living beings, the therapeutic effect is still at the lower level.

For example, the ultrasound therapeutic apparatus produces sound wave with frequency over 20,000 Hz to act upon human body; infrared therapeutic apparatus produces infrared light radiation with wavelengths of 0.72 - 25 μm ; ultraviolet apparatus produces ultraviolet rays with wavelengths of 180 - 380 nm; microwave therapeutic apparatus produces ultra-high frequency electromagnetic waves with wavelengths of 1 - 100 mm; while laser treatments use monochromatic laser light to irradiate the human body. All of these methods have deficiencies in therapeutic effects. The reason is that various physical factors do not match with the spectrum of the human body. The natural frequencies of the molecules, atoms, and electrons in the human body are different from those produced by the various methods, thus cells in the human body are not able to acquire energy and to improve metabolic functions more effectively and the health of the human body is not effectively controlled.

Summary of the Invention

The inventor found through experiments that the status of growth and energy of living beings can be regulated and controlled better only when the energies of the molecules, atoms, and electrons in such living beings are all changed and turned into resonance.

Therefore, the object of the present invention is to provide a method for regulating and improving the status of growth of the living organisms which affects the growth and survival of living organisms by introducing the signals containing simulated bio-frequency spectrum into the living organisms including human beings, animals, plants, and microbes, to make them match with the inherent spectrum of the organisms.

Another object of the invention is to provide an apparatus for regulating and improving the status of growth of the living organisms which can radiate simulated bio-frequency spectrum similar to the inherent spectrum of the living organisms. Applying such spectrum to certain portions of the living organisms and having it matched with the inherent frequencies of and absorbed by the organisms will result in producing high level regulative reactions and achieving regulation and improvement of the status of growth and survival of the living organisms.

The method for regulating and improving the status of growth of the organisms according to the present invention comprises the steps of

- a) Detecting and measuring the signals containing the inherent spectrum of the organisms;
- b) Simulating the signals containing inherent spectrum of the organisms and producing simulated signals identical with, similar or partially similar to the signals containing the inherent spectrum of the organism;
- c) Applying said simulated bio-spectrum signals to the organisms to cause transitions of energy levels of

the elementary particles of the organism and to elicit resonance of the elementary particles, and hence to achieve a biological effect in favor of the regulative function within the organisms.

The apparatus for regulating and improving the status of growth of the organisms according to the present invention comprises:

Energy generating means; means for receiving the energy generated by said energy generating means and generating simulated bio-spectral signals identical, similar or partially similar to signals containing inherent spectrum of the organisms; said simulated bio-spectrum signal generating means comprising one or a plurality of chemical elements and their compounds which are capable of generating said simulated bio-spectral signals.

The method and apparatus according to the present invention have two features:

1. The apparatus can produce an electromagnetic radiation having very broad spectrum which covers visible light band, near and far infrared band, ultra-far infrared band, submillimeter wave band, and possibly centimeter wave band, i.e., completely covers the frequency wave band of the inherent natural oscillations of the organisms.

2. The intensities of the electromagnetic radiations are different at different bands of the spectrum, thus the biological effects they elicit are also different. Those eliciting thermal biological effects are in the range of visible light, near, middle, and far infrared. It accounts for more than 90% of the radiated energy. Those eliciting non-thermal biological effects are ultra-far infrared, submillimeter wave and millimeter waves which occupy a broad frequency range but a low amount of radiant energy. Measurement with a millimeter wave detector shows that, the radiant energy in the range of millimeter wave can be added directly to the weak radiant energy in the millimeter wave band of the organism for they belong to the same order of magnitude. Non-thermal biological effects are produced by the excitation of the resonance of the external electromagnetic radiation with the elementary particles in the living substances.

The above two features of the method and apparatus of the present invention make it possible to solve the following two problems:

1. Combining the easily acquirable thermal effect with the non-easily acquirable non-thermal effect brings about good results in the regulation and improvement of growth of the living organisms.

2. The non-thermal biological effect is significant, but difficult to acquire under the low field intensity and low energy conditions of normal temperature and normal pressure. However, the present invention achieves non-thermal biological effects in submillimeter, millimeter, and possibly to the centimeter wave bands with extremely weak radiant energy which is far below the safety standards for electromagnetic waves in many countries and therefore will not cause damage to the living organisms.

These two features are sufficient to produce meaningful complicated biological and physiological processes including neuro-humeral regulation and comprehensive regulative reactions of individual cells and tissue systems which bring the functions of the organism into full play and cure diseases.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 schematically shows the inherent bio-frequency spectrum of the living organism and the simulated bio-frequency spectrum produced in accordance with the present invention;

Fig. 2 schematically shows the simulated bio-frequency spectrum produced in accordance with the present invention and the spectrum produced with the conventional physical means;

Fig. 3 is the schematic diagram showing the apparatus for regulating and improving status of growth of the organism according to the present invention;

Fig. 4A - 4D are embodiments of the simulated bio-frequency spectrum generator according to the present invention;

Fig. 5A - 5C are schematic diagrams showing regulation and control of the status of growth of the organisms by utilizing the apparatus according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

In Fig. 1, the broken line denotes the range of distribution of the inherent bio-spectrum, with the wavelengths ranging from $0.2 \mu\text{m}$ to $100,000 \mu\text{m}$. The solid line denotes the simulated bio-spectrum generated according to the present invention, wherein $0.45 - 0.72 \mu\text{m}$ is the spectral range of eliciting transition of the electrons; $0.72 - 50 \mu\text{m}$ is the spectral range of eliciting rotation of molecules; $50 \mu\text{m} - \text{several cm}$ is the spectral range of eliciting transition of atoms.

Fig. 2 shows one of the current infrared devices ($0.72 - 3 \mu\text{m}$) which covers a very short band of the inherent bio-spectrum. The biological effect is mainly thermal. Another one of the current far infrared devices ($0.72 - 50 \mu\text{m}$) radiates a wider range of infrared spectra but still a short range in the inherent bio-spectrum. Its main

biological effect remains in the thermal effect. The method and the apparatus of this invention which matches the inherent bio-spectrum can generate a very broad range of frequency spectra (0.45 - $10^5 \mu\text{m}$). The method and the apparatus of this invention can induce more profound biological effects which include thermal and non-thermal effects.

Fig. 3 is the apparatus for regulating and improving the status of the living organism according to the present invention. In Fig. 3, 1 represents the energy source; 3 represents the energy transducer; 4 represents simulated bio-spectrum generating component; energy transducer 3 and generating component 4 constitute the simulated bio-spectrum generator 2. Energy source can be of many forms, such as electrical energy, thermal energy, magnetic energy, solar energy, chemical energy, or biological energy, etc. Electrical energy is preferable because it is easy to acquire. The energy generated by the energy source is transduced into thermal or magnetic energy by energy transducer to provide energy to the simulated bio-spectrum generating component. The simulated bio-spectrum generating component is composed of monomer or compounds of one or more chemical elements in the periodic table. Upon excitation by the energy, the transitions of energy levels of the elements or their compounds are emitted in the form of electromagnetic radiation to form a physical field of simulated bio-spectrum and acts on the organism through radiation. When it matches with the strong absorption band of the organism, a large portion of the radiant energy carried by the electromagnetic wave is absorbed, causing changes of the energies of molecules, atoms, or electrons in the living organism, which then elicits oscillation, enhances bio-oxidation and improves energy of the cells to increase the permeability of cell membrane. With millions and millions of cells reacting in a manner like this, an integrated biological effect is formed, which increases the circulation of body fluid, improves the regulative function of the nervous system, enhances photosynthesis, and finally, engenders the effects in favor of the regulation of growth of the organism. As for the human body, the above four kinds of functions are provided at the same time.

Fig. 4A - 4D show the embodiments of the simulated bio-spectrum generator according to the present invention. In Fig. 4A-1, the simulated bio-spectrum generating component 4 comprises a substrate 4B and an emitting layer 4A disposed on the substrate and composed of borides, nitrides, carbides, sulfides, or fluoride. 5 is the electrode. The proportions of these element and their compounds are determined depending upon the kind of organism to be regulated and its status of growth. This will be described in detail later. Material of the substrate is selected according to the type of energy source which is electrical power source in this embodiment. The substrate can be made from non-metal materials, such as ceramics with low hygroscopic property, high heat resistance, high mechanical strength, high radiance, or heat resistant ($< 150^\circ\text{C}$) plastics with high radiance or quartz glass, micro crystal glass or other kinds of glass with high heat resistance and high strength. It can also be made from electric materials such as carbon rod or resistors which have high electric conductivity and are capable of reaching heat producing temperatures. Various kinds of chemical elements and their compounds are mixed in the right proportion, and then diluted into liquid adhesive, or they may be made into coating material or enamel pulp and coated onto the surface of the substrate to form the emitting layer. Energy transducer 3 can be an electric heating wire or the like which is embedded into the substrate (as shown) or disposed on the ends of the substrate to convert electric energy into thermal energy. The heat generated by the heating wire is used to excite the chemical elements in the emitting layer. The temperature should not be lower than the body temperature of the living organisms.

The heating wire 3 in Fig. 4A-1 can be replaced by a layer of conducting membrane 3 (Fig 4A-2) formed on the surface of the substrate by means of metal oxidation technique (high temperature hydrolysis of chlorides to form conducting membrane of metal oxides) to make the simulated bio-spectrum generator more solidified thus increasing the speed and efficiency with which the electric energy is converted into thermal energy (Fig. 4A-1). In Fig 4A-2, the emitting layer 4A is coated on the surface of the conducting membrane.

Fig. 4B-1 is another embodiment of the simulated bio-spectrum generator according to the present invention. In this embodiment, substrate 4b is integrated with the energy transducer 3 in a manner that conducting substance is infiltrated into non-metal material to make it electrically conductive and have satisfactory resistance. The emitting layer 4A is then coated onto substrate to form a simulated bio-spectrum generator. The substrate can also be made from metals. In this case, electric current introduced into the substrate is converted into thermal energy and the substrate acts as the energy transducer at the same time. Then a layer of enamel pulp mingled with one or more chemical elements and their component in the right proportion is coated onto the metal substrate and sintered under high temperature to form a simulated bio-spectrum generator of metal substrate.

In Fig. 4B-2, the chemical elements and their compounds constituting the emitting layer 4A can also be doped into substrate 4B and then sintered under high temperature to form a simulated bio-spectrum generator (Fig. 4B-2) which is even more integral than that of Fig. 4B-1, as shown in Fig. 4B-2.

Fig. 4C-1 is still another embodiment of the simulated bio-spectrum generator according to the present invention. In this embodiment, one or more chemical elements and their compounds are mixed in the right pro-

portion with pot clay and sintered into an integral body so that the substrate per se contains the constituents that generate the simulated bio-spectrum. When energy transducer such as electric heating wire is embedded into the substrate, an integrated simulated bio-spectrum generator is formed.

In Fig. 4C-2, a conducting membrane 3 can be plated onto the surface of the substrate 4B containing the chemical elements of the emitting layer 4A. The conducting membrane 3 replaces the heating wire 3, and makes the simulated bio-spectrum generator a more integral body as shown in Fig. 4C-2.

Fig. 4D is still another embodiment of the simulated bio-spectrum generator according to the present invention. In this embodiment, temperature resisting glass is used as their material of the substrate and one or more chemical elements and their compounds are mixed in the right proportion into the raw glass during sintering. A special glass body containing the constituents that generate the simulated bio-spectrum is formed by sintering. Then a layer of semiconductor membrane is formed on the surface of the glass as the energy transducer by means of the metal oxidation, thus forming a colorless and transparent simulated bio-spectrum generator. In this embodiment, the material of the substrate can also be pot clay containing one or more chemical elements and their compounds so that the substrate per se contains constituents that generate the simulated bio-spectrum. An integrated solid ceramic simulated bio-spectrum generator is formed by disposing a layer of conducting membrane of metal oxides on the surface of such a substrate as an electrically conducting energy transducer.

The substrate can be made from either permanent or electric magnetic materials. In this case, the emitting layer is plated onto the magnetic substrate and a non-thermal simulated bio-spectrum generator made from magnetic material is formed.

The chemical elements to be used in the simulated bio-spectrum generator are selected in accordance with the following principles:

a. The spectrum of radiation of the chemical elements after acquiring energy should be distributed as widely as possible between the micrometer band and the millimeter band. If the radiation is only in the micrometer (infrared) band or only in the millimeter band, the biological effects produced are not good enough. In order to make the produced biological effects favorable to the growth and development of the living organisms, radiant signals should be present all over the range from micrometers to millimeters. Therefore, a broad spectrum of $\mu\text{m} - \text{mm}$ is a distinct feature of the apparatus of the present invention. Selection and proportion of the chemical elements are indispensable to the realization of the broad frequency spectrum and are based on the fact that the elements must be able to generate a spectrum approximating to the bio-spectrum when excited by energy.

b. The elements should be technically as similar to the chemical constituents of the bio-substances in the living organism as possible. The frequency distribution of the inherent bio-spectrum of the organism is then considered.

The chemical elements the present invention concerns include most of the elements of the 2nd, 3rd, 4th, and 5th periods of the Mendeleev periodical table, and the rare earth elements of the lanthanum and actinium series. Most of these elements are metal elements and are used in the form of oxides, fluorides, nitrides, sulfides, borides, or carbides. The chemical elements used in the method and apparatus according to the present invention for the purpose of simulating or partially simulating the bio-spectrum of the living organisms are shown in Table A.

Table A. Chemical elements used in the present invention

Monomer	Oxides	Carbides	Nitrides	Fluorides	Borides
Cobalt Co					
Copper Cu					
Molybdenum Mo					
Lithium Li					
Beryllium Be	BeO	Be ₂ C	Be ₃ N ₂		
Boron B	B ₂ O ₃	B ₄ C	BN		
Magnesium Mg	MgO			MgF ₂	
Aluminum Al	Al ₂ O ₃				
Silicon Si	SiO ₂	NbC	NbN		
Potassium K	KO				
Calcium Ca	CaO				
Titanium Ti	TiO ₂	TiC	TiN		TiB ₂
Vanadium V	V ₂ O ₅	VC	VN		VB ₂
Chromium Cr		Cr ₃ C ₂	CrN		CrB (Cr ₃ B ₄)
Manganese Mn	MnO ₂			MnF ₂	
Iron Fe	Fe ₂ O ₃				
Nickel Ni	NiO				
Zinc Zn	ZnO			ZnF ₂	
Germanium Ge	GeO				
Strontium Sr	SrO				
Zirconium Zr	ZrO ₂	ZrC	ZrN		ZrB ₂
Niobium Nb		NbC	NbN		NbB ₂
Tantalum Ta		TaC	TaN		TaB ₂
Hafnium Hf	HfO ₂	HfC	HfN		HfB ₂
Selenium Se					
Thorium Th	ThO ₂	TnC	TnN		TnB ₄ (TnB ₆)
Tungsten W		WcW ₂ C			WB
Cerium Ce	CeO ₂				
Gold Au					
Yttrium Y	Y ₂ O ₃				

In the course of application of the present invention, one or a plurality of elements and their compounds can be selected from Table A according to the specific living organism to be regulated or the requirements for the simulation or partial simulation of the bio-spectrum.

The mixture ratio of the elements used in the emitting layer of the simulated bio-spectrum generator for different purposes and the applications of the apparatus according to the present invention will now be described by way of examples.

Example 1. Treatment of AIDS

When the apparatus of the present invention is used in the treatment of AIDS, the emitting layer of the simulated bio-spectrum generator contains 16 elements mainly in the form of oxides. The mixture ratio is: chromium oxide 95%, selenium oxide $\geq 1\%$, chromium $\geq 0.8\%$, germanium oxide $\geq 0.8\%$, zinc oxide $\geq 0.5\%$, ferric oxide $\geq 0.5\%$, magnesium oxide $\geq 0.2\%$ copper oxide $\geq 0.1\%$, cobalt oxide $\geq 0.1\%$, manganese oxide $\geq 0.1\%$, molybdenum oxide $\geq 0.1\%$, strontium oxide $\geq 0.1\%$, vanadium oxide $\geq 0.1\%$, aluminum oxide $\geq 0.1\%$, silicon oxide $\geq 0.1\%$, lanthanum $\geq 0.1\%$, magnesium fluoride $\geq 0.1\%$.

In treating AIDS with the apparatus so constructed, single point irradiation, localized multi-point irradiation or general irradiation can be adopted. The principle of treatment is to prevent the onset of the disease and inhibit the antigen (HIVAg) for patients of early infection, to increase the T cells, improve the patient's condition, and to resume immunity for patients of metaphase infection, to control the state of illness, to maintain life so as to alleviate the symptoms and to resume physical strength for patients of late stage.

The process of treatment is as follows:

(1) Local single point treatment (Fig. 5A):

Single points on chest, back, abdomen, head, feet, face, cervical vertebrae, and femur are irradiated with the apparatus containing above elements in the emitting layer continuously for at least 5 minutes, 1 - 2 times a day, 30 days a course. Treatment may be conducted course by course without interruption. The therapeutic dose is controlled to the rate with which the patients feel comfortable.

(2) Localized multi-point treatment (Fig 5B):

Simultaneous irradiation to the thymus, spleen, stomach and intestines, vertebrae, femur, head, and feet is required in this case for at least 5 minutes at a time, 1 - 2 times a day, 30 days making one course. There may be no interruption between courses.

(3) General irradiation (Whole body treatment (Fig. 5C)):

The whole body is irradiated for at least 5 minutes a time, 1 - 2 times a day. 30 days make a course and no interruption between courses is strictly required.

(4) For patients in the exacerbation period:

The following process should be followed in addition to those described in (1), (2) and (3):

A. When accompanied with swelling of lymph nodes--irradiation should be directed to bilateral cervical, submaxillary and inguinal lymph nodes symmetrically.

B. When accompanied with herpes--irradiation should be directed to genitalia, anus, and lip.

C. When accompanied with infection and ulcer of the anus (commonly seen in homosexual lovers)--irradiation should be directed to the lesions.

D. When accompanied by pulmonary cysticercus pneumonia (PCP)--irradiation should be directed to the lung, bronchus, and feet.

E. When accompanied with diarrhea--irradiation should be directed to the abdomen and feet.

F. When accompanied with Kaposi's sarcoma--irradiation to the lesion and the whole body is required.

G. When accompanied with perleche of buccal cavity and tongue--irradiation to buccal cavity and tongue, or intra-buccal cavity irradiation is required.

H. When accompanied with epilepsy--irradiation should be directed to head and feet.

I. When accompanied with fatigue and insomnia--irradiation should be directed to the abdomen, head, and feet.

J. When accompanied with weakness of memory and headache--irradiation should be directed to head, abdomen, and feet.

In addition to above four methods of treatment, drugs like AZT, interferon, inhibiting or regulating agents and various nutritive drugs, medical herbs (Chinese medical herbs) may be used together with the irradiation to increase the therapeutic effects or to assist the treatment.

Results of treatment of AIDS:

Twenty-five intermediate or late stage AIDS patients have been treated in accordance with the present invention. Rate of disappearance or improvement of clinical symptom is 70%. The course of treatment is 6 months, 2 times a day. The antigen of AIDS virus (HIVAg) disappeared in 4 cases after treatment. For some of the patients in the early stage of infection of the virus (HIVAg positive), HIVAg was turned to negative after 3 - 6 months treatment.

Typical case 1, a male of 42 years from New York. Before treatment: thin and fatigued with swollen lymph nodes, T4: 350, HIVAg: 164. After two months treatment: fatigue disappeared, swelling of lymph nodes subsided, subjective feeling was well. T4: 460, HIVAg negative.

Typical case 2, a male from New York. Before treatment: fatigue, thin and extremely exhausted, accompanied with cysticercus pneumonia, anal herpes and Kaposi's sarcoma, T4: 1 (normal value is 404--1700). After treatment: T4: 1, HIVAg not detected, fatigue relieved, cysticercus pneumonia and anal herpes disappeared, Kaposi's sarcoma of the nose subsided, body weight increased by 15 pounds.

Example 2. Treatment of Hepatitis

When used in the treatment of hepatitis, the emitting layer of the simulated bio-spectrum generator of the apparatus according to the present invention should contain:

chromium oxide 95%	ferric oxide \geq 0.5%
chromium \geq 0.8%	zinc oxide \geq 0.4%
copper oxide \geq 0.1%	cobalt oxide \geq 0.1%
manganese oxide \geq 0.1%	molybdenum oxide \geq 0.1%
selenium oxide \geq 0.7%	strontium oxide \geq 0.1%
vanadium oxide \geq 0.1%	aluminum oxide \geq 0.1%
magnesium oxide \geq 0.1%	silicon oxide \geq 0.1%
germanium oxide \geq 0.6%	lanthanum \geq 0.1%
Boric oxide \geq 0.1%	magnesium fluoride \geq 0.1%

20 The method of treatment is as follows:

When the apparatus so constructed is used to treat various types of hepatitis and cirrhosis of liver, the irradiation is directed to liver region, stomach region, vertebrae, feet, and hands individually or collectively. Whole body irradiation may also be used in this case.

25 The course of the treatment is 30 days with 1 - 2 times a day and 10 - 60 minutes a time, 1 - 7 courses are needed.

Dosage: The simulated bio-spectrum generator of the apparatus is placed 20 - 60 cm from the human body. It is preferable that the patient feels warm and comfortable.

Drugs like immunity regulating agents or nutritives can be used during the treatment.

Effects of treatment:

30 Fifty cases of type B hepatitis were treated with another 50 cases as control group. After one month of treatment, total protein (TP) increased apparently ($P < 0.05$), while albumin (A) increased significantly ($P < 0.01$). Rate of relief or disappearance of clinical symptom is 85%, serological and liver function parameters are improved, positive turning rate of HBSAg surface antigen is higher than 20%. In addition, 11 cases of cirrhosis of liver accompanied with swelling of spleen were treated. Albumin (increased apparently ($P < 0.05$)). Type B
35 ultra-sound follow-up examination shows spleen has shrunk continuously; in four cases, spleen has shrunk to within normal range.

Mechanism of treatment of hepatitis:

Type B hepatitis is caused by the continuous duplication of HBV, which results in chronic immunological damage to liver tissue. At early stage, the pathologic change in liver tissue is mainly degeneration of cells and
40 inflammatory infiltration. As the change proceeds further, focal necrosis of liver cells, proliferation of fibrous tissues and damage to lobular plates and bridge formation may occur. When the lesions develop continuously, cell necrosis and accretion will be repeated, pseudo-lobulars will be formed continuously and portal cirrhosis of liver will ensue. In the treatment of the hepatitis using the apparatus of the present invention, the bio-spectrum acts directly on the elementary mass particles (molecules, atoms, electrons) in the liver cells to cause
45 transitions and acquisition of energy by the liver cells. Due to the biological effects produced in the cells, organs and tissue systems by the bio-spectrum of the present invention, it is possible to stop the development of diseases effectively and in a timely fashion, to enhance the biochemical metabolism and the generation of normal cells, and to improve circulation in the liver tissue and parameters like serum albumin, and finally to achieve the goal of treatment.

50 Example 3. Treatment of Tumors

The apparatus of the present invention can be used for the treatment of many kinds of tumors. In the apparatus for the treatment of tumors, the emitting layer of the simulated bio-spectrum generator should include
55 the following constituents:

chromium oxide 93%	ferric oxide \geq 0.5%
chromium \geq 0.8%	zinc oxide \geq 0.5%
copper oxide \geq 0.1%	cobalt oxide \geq 0.1%
manganese oxide \geq 0.1%	molybdenum oxide \geq 0.1%
selenium oxide \geq 1%	strontium oxide \geq
0.1%	
vanadium oxide \geq 0.1%	aluminum oxide \geq 0.1%
magnesium oxide \geq 0.1%	silicon oxide \geq 0.1%
germanium fluoride \geq 0.1%	lanthanum \geq 0.1%
magnesium fluoride \geq 0.1%.	

Elements like lithium, potassium, and titanium may also be added, but the content of each of the should not exceed 0.2%.

In order to accurately confirm the therapeutic effects of the apparatus of the present invention containing the above constituents, experiment was made using the cross-bred kunming mice provided by the animal center of the Chinese Academy of Medical Science as test subjects.

Cells of ascitic type liver cancer H₂₂ were inoculated, ascitis was accumulated 48 hours later. The mice were then randomly divided into four groups and irradiated with the apparatus of the present invention containing the above constituents at a distance of 20 cm, one time (20 minutes) a day, the dose was 5 - 30 mW/cm². The control group was injected with Pin Yang Mei Su, an anti-cancer drug produced by the Hobei Drug manufactory, Tianjin, China, intra-peritoneally 0.1 mg every other day.

Analysis of ascitic fluids which were randomly withdrawn 10 days later shows that in the treated mice, infiltration around tumor cell was apparent, the number of lymphocytes increased from 22 to 41 (both B cells and T cells of the lymphocytes have anti-cancer action) and number of cancer cells were apparently less than those in the control group. Apparent changes in DNA content in cancer cells in the mice treated with the bio-spectrum were proved by morphmtering of the nucleus by image analysis system, DNA multi-body determination, nucleolus surface determination and determinations of total number, and size of granulus.

Example 4. Radiation Protection

Damage caused by radiation can be protected and reduced by using the apparatus of the present invention. The emitting layer of the simulated bio-spectrum generator for this purpose should contain the following:

chromium oxide 94%	ferric oxide \geq 0.5%
chromium \geq 0.8%	zinc oxide \geq 0.7%
copper oxide \geq 0.2%	cobalt oxide \geq 0.2%
manganese oxide \geq 0.3%	molybdenum oxide \geq 0.1%

selenium oxide \geq 0.9%

strontium oxide \geq 0.1%

vanadium oxide \geq 0.1%

aluminum oxide \geq 0.1%

5 magnesium oxide \geq 0.1%

silicon oxide \geq 0.1%

germanium oxide \geq 0.8%

lanthanum \geq 0.1%

10 $\text{CaCO}_3 \geq$ 0.1%

Experimentation was made on protection of animals from radiation injury using the apparatus described in this example.

15 Kunming mice, guinea pigs (serum) and sheep (whole blood) were used in the experiment. The animals were irradiated externally with γ -ray of ^{60}Co and internally with ^3H -water γ -ray, then treated with the apparatus of the present invention (preventive treatment before the irradiation serves the same function) two times a day, 30 minutes each time, 30 days a course. The apparatus was placed 25 cm from the animals and the dose was controlled to 5 - 30 mW/cm². The results are shown in

20 Table 1:

25

30

35

40

45

50

55

Table 1. Results of experiment with the apparatus of the present invention

Series no.	Parameters	Reaction to Irradiation	Reaction to Irradiation plus bio-spectrum (before or after irradiation)	Beneficial Effects
1	Blocks walked in open field	100	130	Increase of nerve excitability
2	Times of probing on a punched	100	110	Increase of ability of exploration
3	Avoidance of electric shock on platform	100	110	Increase of learning memory
4	Number of deformed bone marrow cells	100	74	Reduction of radiation injury
5	Slit in single chromosome	100	21	Reduction radiation injury
6	Survival of mice	100	120	Increase of survival rate
7	Number of PFC/ 10^5 spleen cells	100	330	Increase of immunologic function
8	Spleen index of mice	100	130	Increase of immunologic function
9	Rate of micronucleus of lymphocytes	100	76	Reduction of radiation injury

The nine biomedical indexes in Table 1 shows that the simulated bio-spectrum has anti-radiation effects or can prevent or reduce the damage from radiation.

Example 5. Delay of Natural Degeneration of the Living Organisms

The simulated bio-spectrum generator of the present invention can be used to affect the tendency of natu-

ral degeneration of the living organisms when the following constituents are added:

5	chromium oxide 94%	ferric oxide \geq 0.5%
	chromium \geq 0.8%	zinc oxide \geq 0.6%
	copper oxide \geq 0.2%	cobalt oxide \geq 0.2%
10	manganese oxide \geq 0.3%	molybdenum oxide \geq 0.1%
	selenium oxide \geq 0.9%	strontium oxide \geq 0.1%
	vanadium oxide \geq 0.1%	aluminum oxide \geq 0.1%
15	magnesium oxide \geq 0.1%	silicon oxide \geq 0.1%
	germanium oxide \geq 0.8%	lanthanum \geq 0.1%
	KI \geq 0.1%	BO ₂ \geq 0.1%
20	CaCO ₃ \geq 0.1%	MgF ₂ \geq 0.1%

25 To verify the effects of the present invention in this regard mice were irradiated with the said apparatus continuously for 48 days, 2 times a day, 35 minutes a time, at a dose of 5-30 mW/cm² and observation was kept on the natural degeneration of the fur and the naturally swollen manubrium sterni. The results are shown in Tables 2 and 3.

30 Table 2. The effects of simulated bio-spectrum
on the natural degeneration of fur in mice

35	Group	Number of	Tail tip	Middle segment	Tail tip	Middle segment	Total %
	control	57	7	1	4	12	21
40	simulated bio-spectrum	53	5	0	0	5	9.4

45 The white turning rate of the fur on the tail was 21% in the control group, while only 9.4% in the bio-spectrum treated group. Hence there is a tendency of delaying the natural degeneration.

50

55

Table 3. Effects of simulated bio-spectrum on the swelling of manubrium sterni

5

Group	Number of mice	Natural swelling of manubrium sterni	P value
control	57	10 (17.5%)	P < 0.001
simulated bio-spectrum	53	1 (1.9%)	

15

In Table 3, the percentage of swelling of manubrium sterni in the control group is 17.5%, while that of the bio-spectrum treated group is only 1.9%. $P < 0.001$ as verified with the x test.

Example 6. Treatment of Epilepsy

20

When the apparatus of the present invention is used for the treatment of epilepsy, the following constituents should be added into the simulated bio-spectrum generator:

chromium oxide 94%	ferric oxide \geq 0.5%
chromium \geq 0.8%	zinc oxide \geq 0.5%
copper oxide \geq 0.1%	cobalt oxide \geq 0.1%
manganese oxide \geq 0.1%	molybdenum oxide \geq 0.1%
selenium oxide \geq 0.9%	strontium oxide \geq 0.1%
vanadium oxide \geq 0.1%	aluminum oxide \geq 0.1%
magnesium oxide \geq 0.1%	silicon oxide \geq 0.1%
germanium oxide \geq 0.8%	lanthanum oxide \geq 0.1%

40

and a small amount of metal elements such as lithium, potassium, and sodium, their total amount should not exceed 0.5%.

45

To treat epilepsy, head, neck, feet, and hands are irradiated two times a day, 45 minutes per time with 12 days making a course. The sites to be treated must be naked and the dose is controlled to that with which the patients feel comfortable.

Mechanism of treatment and therapeutic effects:

50

55

The brain is the highest nervous center. The metabolism of brain tissue depends strictly on the continuous supply of circulated blood to the brain. Damage to the hypothalamus by whatever reason can cause attack of autonomic epilepsy. Epilepsy is also closely related to changes in the cerebral vessels, cerebral blood flow (CBF), and oxygen demand. Since the simulated bio-spectrum of um to mm is acted on the brain, mainly on the hypothalamus cells, to improve its conditions, the improvement of the blood circulation in the brain and regulation of the autonomic nerves, sympathetic nerves and brain can prevent the formation of abnormal discharges of the epileptic focus. Clinical use of the apparatus for the treatment of 45 cases together with 30 cases treated with conventional drugs as control group shows that the effective rate of a 40 day course treatment is $> 90\%$, $P < 0.05$ as compared with that of the control group. Abnormality rate of electro-encephalogram (EEG) of the patients is reduced by 55% after treatment, while the normal rate increased by 1.4 times. The

abnormality rate of reoencephalogram (REG) of the patients is reduced by 45.72%, while the normal rate increased by 1.9 times after treatment. Recurrence occurred in all of the control cases within 7 - 30 days, while there had been no recurrence in the cases treated with the apparatus within six months. In addition, anxiety, nervousness, and depression were eliminated.

Example 7. Quick Healing of Wounds and Burns

The apparatus of the present invention is applicable in accelerating the healing of various wounds and burns by adding the following constituents into the simulated bio-spectrum generator:

chromium oxide 95%	ferric oxide \geq 0.5%
chromium \geq 0.8%	zinc oxide \geq 0.5%
copper oxide \geq 0.1%	cobalt oxide \geq 0.1%
manganese oxide \geq 0.1%	molybdenum oxide \geq 0.1%
selenium oxide \geq 0.9%	strontium oxide \geq 0.1%
vanadium oxide \geq 0.1%	aluminum oxide \geq 0.1%
magnesium oxide \geq 0.2%	silicon oxide \geq 0.1%
germanium oxide \geq 0.8%	lanthanum \geq 0.1%

To treat various wounds and burns, the apparatus is used 1 - 2 times a day, 35 minutes a time. Irradiation from the apparatus is directed to sites of treatment, i.e., opening or surface of the wounds which should be naked and cleaned. Therapeutic effects are remarkable. In the treatment of burns, the pain is rapidly relieved; a membrane is formed, sealing the surface of burn and the restoration stage starts immediately thereafter so that dangerous acute infections are prevented. Since it can improve the microcirculation, metabolism, and regeneration of blood vessels, tissues are enhanced very significantly. As exemplified by second degree burns, the wounds of the patients in the treated group were healed in four days on the average (treated with the apparatus one time a day) with the wound surface being exposed completely during the treatment. While the control cases were treated with dressings change, injections, and medications and healed in 15 days on the average accompanied with pain. At early stages of the wound, the method and apparatus according to the invention can relieve the patients from pain rapidly, reduce exudation from the wound surface, and facilitate the generation of fiber cells, T cells, and white cells to strengthen the ability of healing. Since the circulation of body fluid is enhanced, the products of inflammation are well absorbed, and the scars formed are slight, healing is apparently accelerated, which enables the patients to pass through the course with little anxiety or pain.

The most distinct changes of healing during treatment of the wounds with the apparatus according to the invention take place on the 2nd - 4th day when the following phenomena of healing appear (incisional wound observed under microscope):

- (1) W B C in superficial layer of skin changes from "distinct" to "disappeared";
- (2) lymphocytes in dermis layer change from "many" to "little";
- (3) fibroblasts proliferate as the healing begins, then reduce in number (representing well healed);
- (4) tissue edema disappear (representing healed).

All of these phenomena appear 1 - 3 days earlier than in the control group.

Results of clinical experiment on abdominal incisional wound show that the stitches were removed after seven days with the conventional method of treatment while stitches could be removed only four days (80 - 96 hours) after the operation when the apparatus is used according to the invention, and the standard of class A healing was achieved. Both pain and infection were also apparently controlled and administration of antibiotics were not needed. Body temperature returned to normal in 80 hours. Local tenderness of wound was reduced.

Example 8. Treatment and Prevention of Common Cold

Common cold can be treated with the apparatus described in example 7 in a manner that head, nose, buccal cavity, throat, neck, feet, and knees are irradiated 1 - 2 times a day, 30 - 120 minutes a time for a course (1 - 7 days). When used for the prevention of common cold, irradiation for three months continuously (1 - 2 times a day) is needed at the beginning. Then it can be reduced to three times a week.

Therapeutic effects: At the early stage (on the day of appearance of the symptom, or Catarrh stage), the effective rate is > 70% after only one time of treatment. Body temperature can be reduced to normal after two hours treatment in cases with ordinary fever. For cold at other stages, symptoms can be relieved, time of convalescence shortened and complications prevented.

Example 9. Treatment of Herpes

Simple herpes or herpes zoster can be treated with the apparatus described in example 7, 1 - 2 times a day, 40 minutes a time, for at least a course (5 days). The sites of treatments are now the lesions of the herpes, lymph node, feet, and spleen.

Therapeutic effects are remarkable for painful symptoms were eliminated or relieved in 1 - 3 days, blisters subsided distinctly, rate of relapse reduced after 1 - 4 courses of treatment. An effective rate higher than 90% was confirmed in 50 cases, $P < 0.01$ as compared to the control group.

Example 10. Treatment of Angiocardiopathy and Cerebrovascular Disease

The apparatus can be used in the treatment of angiocardiopathy and cerebrovascular disease when the following constituents are added into the simulated bio-spectrum generator:

chromium oxide 92%	ferric oxide \geq 0.5%
chromium \geq 0.8%	zinc oxide \geq 0.7%
copper oxide \geq 0.1%	cobalt oxide \geq 0.1%
manganese oxide \geq 0.2%	molybdenum oxide \geq 1%
selenium oxide \geq 1%	strontium oxide \geq
0.1%	
vanadium oxide \geq 0.1%	silicon oxide \geq 0.1%
germanium oxide \geq 0.1%	lanthanum \geq 0.1%
KI \geq 0.1%	

Suitable amount (no more than 0.2%) of elements like titanium or boron are added.

In treating such diseases, irradiation is directed to precordial region, feet, hands, vertebra, neck and head 1 - 2 times a day, 20 - 60 minutes a time, for at least one course (12 days).

Therapeutic effects: Since volume of blood vessels and stroke volume of the heart are increased due to the irradiation by the apparatus, blood and oxygen supply to the heart and brain are significantly improved, which in turn improves function of the heart and brain. Electrocardiogram and electroencephalogram are also improved. So the apparatus is applicable in treating many kinds of diseases of cardiac or cerebral tissues or blood vessels. These effects are verified by animal experiments and clinical observations. It is very effective in eliminating premature beats or inverted T wave in virus myocarditis and changes of S-T segment due to coronary blood supply insufficiency, and also capable of regulating and improving systolic conditions of the heart.

Clinical trial of the treatment of hypertension demonstrated that after 10 days treatment with the apparatus of the present invention by irradiating the underside of the foot, precordial region, hands, arms, and cervical

vertebra, systolic blood pressure dropped by 7.1% (11.4 mm Hg, $P < 0.002$), diastolic blood pressure (DBP) dropped by 7.9% (7.9 mm Hg, $P < 0.001$) in the treated group. The total effective rate is 54.3% ($N=25$). If the course of treatment is longer than 10 days, the effective rate will increase obviously and the rate of lowering of blood pressure will be higher than 80%.

5 Clinical trial of the treatment of coronary heart disease demonstrated that the effective rate of treatment of coronary heart disease with the apparatus is higher than 85%, improvement in myocardial ischemia and cardiac function is apparent and statistically significant ($P < 0.01$).

The criteria of improvement of myocardial ischemia are relief of angina pectoralis, recovery of ST-T changes, elevation of depressed ST more than 1.0 mm.

10 The criteria of improvement of cardiac function are as follows: the cardiac function is lowered by one grade and reaches grade 0 or 1; the symptoms are relieved.

Example 11. Treatment of Rheumatoid Arthritis and Other Diseases of Joints or Soft Tissues

15 Rheumatoid can be treated with the apparatus described in example 7 in a manner that the diseased joints, spleen, femur, and feet are irradiated 1 - 2 times a day, 30 - 60 minutes a time, for 1 - 6 courses (20 days make a course).

The treatment can be assisted by externally administered medications such as levamisole applied to the skin or the diseased joint to reinforce the therapeutic effect.

20 The effective rate is higher than 60%. Pain is relieved or eliminated obviously.

106 cases of lumbago (osteoarthritis, damage of the soft tissue) were treated with the present apparatus. The index of lumbago was reduced remarkably ($P < 0.001$), while that of the control group treated with conventional medication and acupuncture showed no significant reduction ($P > 0.051$).

25 Example 12. Human Health Care

The apparatus of the present invention can be used in health care for human body when bio-spectrum in micrometer wavelength range (visible light to 25 μm) is simulated. The simulated bio-spectrum generator should contain the following constituents:

30

selenium oxide \geq 5%

germanium oxide \geq 5%

silicon oxide \geq 50%

thorium oxide \geq 4%

35

cerium oxide \geq 5%

zirconium oxide \geq 15%

boron nitride oxide \geq 10%

titanium carbide \geq 3%

40

tungsten carbide \geq 3%

Besides, platinum 0.01% is added.

45 When the apparatus described in this example is used in health care for human body, it is capable of enhancing body fluid circulation, regulating the nervous system, and strengthening psychosomatic quality. Thus the incidence of commonly encountered diseases like common cold are significantly reduced, digestive functions of stomach and intestine, sleeping blood pressure, heart rate, and cardiac and cerebral functions are improved after three months treatment with the above method. It is particularly effective in the early stage of diseases and discomfort caused by climates, environments, psychological factors, and foods, and capable of helping the human body to regulate and eliminate the internal changes in certain degrees, so that balance of the internal physical and chemical conditions and health of the human body are maintained.

Example 13. Elimination of Fatigue and Enhancement of Recovering of Athletes.

55 The apparatus of the present invention can be used to eliminate fatigue, assist recovery, and increase physical ability and competition power of the professional athlete. The emitting layer of the simulated bio-spectrum generator should contain the following constituents:

aluminum oxide $\geq 85\%$

ferric oxide $\geq 3\%$

cobalt oxide $\geq 2\%$

titanium oxide $\geq 3\%$

5 silicon oxide $\geq 3\%$

hafnium oxide $\geq 2\%$

Besides, platinum 0.01% is added.

10 In eliminating fatigue in athletes and assisting recovery, the apparatus is used to irradiate undersides of the feet, abdomen, lumbar region, kidney region, or the whole body 1 - 2 times a day, 30 minutes a time. It is preferable to use it after intensive exercise for elimination of fatigue, or to use it one hour before competition for regulating psychosomatic condition effectively.

Therapeutic effects: a 30-day trial was made on a group of 46 young or juvenile athletes (24 male and 22 female) engaged in items of endurance with daily irradiation of 30 minutes. The assigned exercise was running 15 along a road with a slope of 150° and at a speed of 10 km/hr. for six minutes. The results show that blood lactic acid level was lower than that before irradiation, flicker fusion threshold increased, reaction time shortened, gripping force and strength of the lumbar and back muscles increased significantly.

Conclusions: the biological effects produced by the method and apparatus of the present invention function through cells receiving the effects and then casting influence on the neuro-endocrine system, especially 20 the sympatho-adrenal system. It is capable of increasing aerobic capacity, improving the psychosomatic condition, increasing appetite and improving dream state, and therefore effective in assisting the recovery from fatigue caused by exercise, and in eliminating the fatigue of central origin.

25 Example 14. Treatment of Disease of Five Five Organs

The apparatus of the present invention can be used to treat diseases of the ear, nose, throat, eye, and buccal cavity when the following constituents are added into the simulated bio-spectrum generator:

30 yttrium oxide $\geq 5\%$

ReCaMnFeOx $\geq 90\%$

silicon oxide $\geq 5\%$

35 In treating diseases of the five organs, the treatment should be conducted 1 - 2 times a day, 20 - 40 minutes a time, with 12 days making a course. Significant effects can be obtained after 1 - 4 courses. The sites of treatment are mainly the sites of the lesions.

Examples of application:

40 Ear: otitis media, impaired hearing;
Nose: various kinds of rhinitis;
Throat: inflammation of pharynx or larynx;
Buccal cavity: ulcers in buccal cavity;
Eyes: conjunctivitis, juvenile myopia

45 Therapeutic effects: the effective rate of treatment of diseases of the five organs is $\geq 80\%$ on the average. Impairment of circulation and nerves are eliminated timely and surgical operation can be avoided. Effective rate of treatment of juvenile pseudo-myopia is $\geq 85\%$.

50 Example 15. Treatment of Diseases of the Kidney

The apparatus of the present invention can be used for the treatment of diseases of the kidney when the following constituents are added into the simulated bio-spectrum generator:

55 chromium oxide $\geq 96\%$

chromium $\geq 1\%$

zinc oxide $\geq 1\%$

silicon oxide $\geq 1\%$

The treatment should be conducted 1 - 3 times a day, 20 - 30 minutes a time with 30 days making a course. The sites of treatment are: kidney region, abdomen, undersides of the feet, lumbar region, leg, or the whole body.

Therapeutic effects: in seven cases of chronic renal failure (CRF), mean BUN decreased by 32.5 mg/dl, mean urine volume increased by 255 ml/d, hemoglobin and scr improved after treatment ($P < 0.05$). Therapeutic effects were obtained without dialysis. The present apparatus is capable of improving the filtering and eliminating function of the renal glomeruli, and of eliminating the accumulation of metabolites of protein. Thus, diseases of the kidney are cured effectively. General post-treatment weakness and symptoms of the digestive tract are improved significantly. SOD and CGRP are also improved.

Various kinds of diseases of the kidney, including renal hypertension, can be treated with this method. It is also effective in preventing the repelling reaction after transplantation of kidney.

Example 16. Treatment of Hemorrhoid

The apparatus of the present invention can be used for the treatment of hemorrhoid when the following constituents are added into the simulated bio-spectrum generator:

titanium oxide \geq 90%	zirconium oxide \geq 5%
silicon oxide \geq 1%	ferric oxide \geq 1.5%
zinc oxide \geq 1%	copper oxide \geq 1%
beryllium oxide \geq 0.5%	

In treating hemorrhoid, lesions at the anus are irradiated 1 - 2 times a day, 20 - 40 minutes a time (12 times make a course). Apparent effects were obtained in 70% of cases after one course treatment. Undersides of feet and abdomen can be irradiated for prevention of exacerbations.

Therapeutic effects: In 64 cases of thrombosed hemorrhoid, 60 cases (93.75%) were cured substantially after one course of treatment. Inflammation and swelling subsided and pain was relieved after 2 - 3 times of treatment. No medication is needed during the treatment. The functions of improving blood circulation and regulating the nervous system performed by the present invention act on the lesion simultaneously, which accelerates the exchange of substances between blood and tissues, increases function of the reticulo-endothelial system, enhances phagocytic power of WBC, reduces muscle tone, loosens sphincter and reduces tract pressure, and therefore causes the swelling to subside in a timely fashion, leading to the thrombosed hemorrhoid being cured effectively.

Example 17. Treatment of Menorrhagia and Gynecologic Disease

The apparatus of the present invention can be used to treat menorrhagia and gynecologic diseases when the following constituents are added into the simulated bio-spectrum generator:

silicon carbide monomer (high purity) 90%	
chromium 2%	zinc oxide 1%
ferric oxide 1%.	

When used for the treatment of menorrhagia and gynecologic diseases (inflammation and sterility), the apparatus of the present example is operated to irradiate the sites of treatment 1 - 2 times a day, 20 - 40 minutes a time. A course for the treatment of menorrhagia contains seven times of treatment while a course for the treatment of other gynecologic diseases contains 30 times of treatment.

The sites of treatment are sites of pain and inflammation abdomen, lumbar region, perineal region, and undersides of the feet.

Therapeutic effects: In 79 cases of menorrhagia, 65 cases (82.3%) were cured and obvious effects were obtained in 10 cases (12.7%).

Among 52 cases of inflammation in the pelvic cavity and its appendix tested, 14 were cured, 36 improved, and 2 ineffective. The effective rate is higher than 90%. The period of treatment needed was 20 days on the average.

15 cases of erosion of cervix uteri were tested, 5 cured, 9 improved, and no effect in 1 case. The period of treatment was 10 days on the average.

It is also effective for treatment of sterility, but the observation is not completed yet.

Example 18. Treatment of Respiratory Diseases

The present invention can be used for treatment of respiratory diseases when the following constituents are added into the simulated bio-spectrum generator:

ferric oxide \geq 20%	zirconium oxide \geq 75%
silicon oxide \geq 2%	zinc oxide \geq 1%
niobium oxide \geq 2%	

When used for the treatment of respiratory diseases the apparatus should act on the patients 1 - 3 times a day, 20 - 40 minutes a time (30 days make a course).

Sites of treatment: bronchus, chest, back, undersides of the feet, preferably the chest and back at the same time.

Therapeutic effects: good anti-asthmatic effects can be obtained in treating bronchial asthma. When chronic asthmatic bronchitis cases accompanied with emphysema are treated for three courses the asthmatic symptoms can be relieved. Preventive results can be achieved for respiratory bronchial asthma.

Cases of acute bronchitis and pneumonia are cured after 7.7 days (average) of treatment, while the control group cured after 9.05 days. The difference is significant ($P < 0.05$).

The mechanism of suppressing the asthma and eliminating inflammation is to increase non-specific immunologic mechanism and anti-allergic action, regulate and balance autonomic nervous functions, reduce excitability of sympathetic nerve, stop cough and sputum, suppress asthma. The apparatus has an anti-infectious function, and is capable of suppressing asthma immediately. It is also effective for emphysema or cor pulmonale.

Effectiveness in treatment of respiratory diseases can be enhanced by accompaniment of medications.

Example 19. Treatment of Diseases of Stomach and Intestine

The apparatus of example 18 can also be used for the treatment of diseases of stomach and intestine. The treatment should be conducted 1 - 3 times a day, 20 - 40 minutes a time. The course for diseases of intestine is seven days.

Sites of treatment are gastric and intestinal regions, knee joint, undersides of the feet.

Therapeutic effects: gastric ulcer and gastritis treated for one course, effective rate $> 90\%$. Chronic gastritis treated for one course effective rate $> 90\%$.

No medication is needed during treatment. It is also effective in treating diseases relating to insufficient enzyme for digestion of milk in stomach.

Example 20. Enhancing Growth of Hair

The apparatus of the present invention can be used for enhancing growth of hair when the following constituents are added into the simulated bio-spectrum generator:

silicon oxide \geq 80%	ferric oxide \geq 2%
vanadium oxide \geq 2%	zinc oxide \geq 2%
5 titanium oxide \geq 2%	boron nitride \geq 2%
tungsten carbide \geq 1%	magnesium oxide \geq 2%
10 calcium oxide \geq 5%	cerium oxide \geq 2%

Method of using this apparatus for treatment of baldness and enhancement of growth of hair is as follows: daily irradiation of 1 - 2 times, 20 - 30 minutes a time is directed for at least one course (30 days) to sites of alopecia over the head, undersides of the feet, abdomen, lumbar, and kidney regions. This apparatus can be used alone or accompanied with prior irradiation local lotion of medications that enhance blood circulation in skin of skull, and stimulate growth of the hair.

Therapeutic effects: This apparatus is mainly used for treating alopecia seborrheica. It regulates endocrine secretion, enhances metabolism, increases skin respiration, so that the subsided growth information and growth of hair roots can be restored.

It is also effective for other kinds of alopecia or even poliosis owing to its anti-senescent function (please refer to example 5).

Example 21. Treatment of Chloasma

The apparatus of example 19 can be used for treating chloasma in a way that irradiation is directed to face, umbilicus, abdomen, kidney region, undersides of the feet, and head one time a day, 20 - 30 minutes a time (30 times make a course).

When skin-protecting lotions or cosmetic measures are used, the facial region can be irradiated with the apparatus before or after the cosmetic measures. Umbilicus, abdomen, kidney region, undersides of the feet, and head can also be irradiated at the same time. It is capable of accelerating the absorption of nutritive substances by the skin and improving blood supply and respiration of the skin locally, while regulating the endocrine system and eliminating impairment of circulation or nervous activities in the whole body, so as to remove the fundamental cause of chloasma internally through the organs, tissues, and the nervous system.

The apparatus of this example can be used for cosmetics and health care. The effects are achieved through the improvement of general physical conditions and prevention of senescence fundamentally.

Example 22. Applications in the Simulation of Bio-Information

Certain informations of the living organism can be simulated with the present invention. For example, body temperature, pulse, heart rate, and the frequency, amplitude, or wave form of bio-physical parameters like ECG or EEG can be simulated by means of various apparatus for the purposes of training and induction, as well as treatment and health care of patients.

Example 22-1. Applications in the Simulation of Informations of Chinese "Qi-Gong" and Indian "Yuga"

It is known from recent studies and measurements that information of Chinese "Qi-Gong" and Indian "Yuga" is in the spectral range of μm - mm . However, the changes and fluctuations of information emitted by those who are practicing Qi-Gong or Yuga are different. According to the results of these studies, the apparatus is capable of simulating informations of Chinese "Qi-Gong" and Indian "Yuga" using the present invention. This kind of apparatus will help train or induce the beginners, or will help the well-trained to enter the practicing state in non-quiet environments by simulating Qi-Gong or Yuga information. When the apparatus of the present invention is used to simulate Qi-Gong or Yuga information, the emitting layer of the simulated bio-spectrum generator should contain:

aluminum oxide \geq 85%

cerium oxide \geq 1%

ferric oxide \geq 5%

cobalt oxide \geq 3%

5 chromium oxide \geq 5%

silicon oxide \geq 1%

When the apparatus is supplied with an electrical power that pulsates at a frequency of 0 - 60 cycles/minute, the spectral information generated approaches that of Qi-Gong or Yuga, and can perform the function of training and health care.

Signals at a broad band or single frequency within the range of μm - mm, when changed both in amplitude and in frequency, will act like the information of Qi-Gong or Yuga.

Example 22-2.

15 According to the principle of the present invention and by using the apparatus of the present invention, the range of the spectrum is restricted to 0.6 - 30 μm . In this case, the simulated bio-spectrum generator contains magnesium fluoride (MgF_2) in 100%.

20 The simulated bio-spectrum of the apparatus of the present invention can also be made to contain mainly magnesium fluoride (50%), the other constituents can be materials with high chromaticity, high rate of radiation, and broad comprehensive spectrum. In this example they are:

magnesium fluoride (MgF_2) \geq 50%	titanium oxide (TiO_2) \geq 5%
25 nickel oxide (NiO) \geq 5%	tin oxide (SnO_2) \geq 1%
manganese oxide (MnO_2) \geq 6%	(BN) \geq 20%

30 This apparatus is power intermittently with a power source which works two seconds in every 10 seconds, so that a changing spectrum is generated.

Example 23. Application in Animals

35 The present apparatus is capable of enhancing the growth and development of animals, increasing hatchability of eggs, improving quality of semen, treating various diseases of the animals, and helping prolong the survival period of rare animals when the following constituents are added into the simulated bio-spectrum generator:

40 chromium oxide \geq 90%	ferric oxide \geq 1%
chromium \geq 1%	zinc oxide \geq 1%
45 copper oxide \geq 0.2%	cobalt oxide \geq 0.2%
manganese oxide \geq 0.5%	molybdenum oxide \geq 0.1%
selenium oxide \geq 1.5%	strontium oxide \geq 0.1%
50 vanadium oxide \geq 0.1%	aluminum oxide \geq 0.2%
magnesium oxide \geq 0.8%	silicon oxide \geq 0.3%
germanium oxide \geq 1%	lanthanum \geq 0.1%
55 KI \geq 0.1%	

1. When this apparatus is used to irradiate the perineal and testis region of the stud stock once a day (20 - 60 minutes) with a surface power of 5 - 30 mW/cm² for 20 days, sperm activity is increased by 10 - 20%, sperm density by 5 - 14%, activity after freezing by 50%, qualified semen can be increased by over three times, and fertility rate is also increased significantly. The effect on the development of the fetus is apparent.

2. When this apparatus is used to irradiate the chickens 30 - 300 minutes a day with the skin temperature of the chicken being controlled to 31 - 37°C continuously or intermittently, body weight of 30-day chickens is increased and diarrhea of chickens is prevented effectively.

3. When the apparatus is used to irradiate the stud eggs, the hatching rate is increased. For this purpose, the eggs are fixed first, irradiation is directed thereto for 30 - 50 minutes, the surface temperature of the eggs is controlled to 36 - 37° C. The process is repeated once a day for 1 - 6 days. 1 - 3 times more irradiation before breaking of the shell can increase the hatching rate by 5 - 20% and can shift the time of outburst to 3 - 20 hours earlier than usual.

4. Application in the treatment of mastitis of cow is confirmed by irradiating to breast of the cow 30 - 50 minutes, 1 - 2 times a day, for a course (five days) or more. After treatment, infections can be controlled, inflammation can be eliminated, and milk production is restored.

5. Application in the treatment of gastroenteritis of animals has been proven. Irradiation to the region of the stomach and intestine should be directed 30 - 60 minutes a time, 1 - 3 times a day for a course (five days) or more. After treatment, inflammation can be eliminated, toxic substances in the gastroenteric tract can be neutralized and gastro-enteric functions are thus restored.

6. The apparatus can be used to treat trauma such as hematoma or sprain of joints. Irradiation to the sites of trauma or sprain, 20 - 40 minutes a time, 1 - 2 times a day for at least a course (four days) can eliminate hematoma, has the products of inflammation absorbed, and reduces sensitivity of the trauma and enhances regeneration and restoration.

Example 24. Applications in Plants

The apparatus of example 22 is capable of influencing the status of growth of plants, but small amounts of potassium, phosphorus, and nitrogen (each kind no more than 0.5%) must be added into the emitting layer of the simulated bio-spectrum generation and the ratio of ultraviolet and visible light in the radiation should also be increased. In this case, the ultraviolet ray can be obtained from a separate source, while the visible light is generated by the present apparatus itself.

The purposes of the application of the present apparatus in plants are:

1. To increase the resistance to adverse conditions, to increase cold resistance, drought resistance, and disease resistance, to improve quality, and to modify variety;

2 To increase rate of germination;

3. To shorten the period of growth of economic crops, to facilitate early ripening, and to increase production and benefits;

4. To influence gene information, to breed new variety, to alter the form and color of plants.

Taking seeds as an example: when seeds are germinating, the starch in endosperm is decomposed into monosaccharides and transported to the embryonic organs. Starch is hydrolysed into maltose by -amylase and -amylase, then decomposed into glucose by maltase to provide substances and energy for the growth of the embryo. The activity of amylase has direct influence on germination of the seeds and growth of the seedlings. The methods and apparatus of the present invention are capable of increasing the total amylase by 100 more than the control group. The activities of peptidase, ascorbic acid oxidase, nitrate reductase, and lipoproteinase are also increased. Seedling respiration is increased after treatment of the seeds.

A. When tobacco seedlings were irradiated with the above mentioned apparatus once a day, 40 minutes a time for three consecutive days from a distance of 40 - 60 cm and with a surface intensity of 0.1 - 0.25 mW/cm², the irradiated tobacco seedlings became resistant to the tobacco mosaic virus, and their resistance to adverse condition and yield also increased.

B. Dry seeds of paddy rice were irradiated with the apparatus within 60 days before sowing under the following conditions: thickness of rice seeds was 1 - 1.5 cm; the simulated bio-spectrum generator was placed 25 - 60 cm apart from the seeds; duration of irradiation was 40 - 150 minutes preferably 100 minutes; surface temperature of the seeds was controlled to 41 - 49° C. After irradiation, rooting ability, tillering ability, shooting ability, drought resistance, disease resistance, quality of seeding were all increased, and yield of rice was also increased.

The apparatus of the present invention can be widely applied to seedling culturing and seed treatment in agriculture, forestry and gardening.

Example 25. Application in Microorganisms

The importance of genes to living beings led to the development of bio-technology and gene engineering. Plants and animals are all composed of cells. There exists a nucleus in the cell and chromosomes in the nucleus. Nuclei of cells of different living beings have different numbers of chromosomes. There are 23 pairs of chromosomes in the nucleus of a human cell, four pairs in a fruit fly cell, seven pairs in a bean cell, but only one single unpaired chromosome in a bacterial cell. Chromosomes are composed of genes which are positioned on two DNA molecules entangled with each other. The specific chemical substances and their arrangements determine the information contained in the genes. DNA is the chemical protoplasm that directs the formation of proteins in the cell, and also performs the function of transporting the features of the original cell to a new cell or organism. The present invention provides a kind of simulated bio-spectrum that causes transition of energy levels of the molecules, atoms, and electrons in the cells. These changes can cast influence on the nucleus, chromosome, gene, or DNA directly, and will help in correcting the connection between chromosomes, and controlling the amount and arrangement of the chemical protoplasm. The present invention will help bio-technology and gene engineering directly or indirectly in the following aspects:

1. Irradiation of fungi with the apparatus of example 24, 1 - 3 irradiations at a dose of 10 - 20 mW/cm² for 30 minutes, can be made on stock plants, original seeds, or cultigens. It can increase functions of the hypha, decompose and absorb nutrients in the matrix and to differentiate fruiting bodies. As compared with the control group, there are tendencies to increase reproductivity, shorten the period of growth and increase yield.

2. Irradiation with the apparatus of example 24 can increase the yield and quality of antibiotics. When the simulated bio-spectrum is used to irradiate the cultures, the irradiation should be made with an intensity of 5-20 mW/cm² and at a temperature of 27 - 30° C for 1 - 3 times (40 minutes a time). Penicillin can be irradiated during the course of production for 40 minutes, the dose is 5 - 10 mW/cm², with ambient temperature of 25-27°C and pH value of 6.8 - 7.2.

The present invention shows a tendency to improve the respiration of the microorganism, and to make the absorption and transformation of oxygen to reach the utmost degree of metabolic activity. It can also be used to increase the quality of brewing.

Example 25-1. Direct Action on DNA

Erroneous connection of chromosome, arrangement, and amount of DNA can cause handicaps and diseases such as tumors or Down's Syndrome in human beings. The apparatus can perform the function of directly repairing and regulating DNA which is conducive to the relief of diseases. The emitting layer shown contains the following compounds:

chromium oxide ≥ 80%	beryllium oxide ≥ 1%
copper oxide ≥ 2%	zinc oxide ≥ 3%
cobalt oxide ≥ 2%	niobium oxide ≥ 1%
calcium oxide ≥ 3%	strontium oxide ≥ 1%
silicon oxide ≥ 2%	selenium oxide ≥ 2%
molybdenum oxide ≥ 1%	ferric oxide ≥ 2%

Example 25-2. Enhancement of Microbiologic Drug Manufacturing

The apparatus of example 25-1 can help in synthesizing insulin by DNA recombination technique. The genes that produce insulin are first found out from the nucleus of the human beings and cut down with restriction enzyme. Then, the plasmid in bacteria is also cut down and combined with the genes that produce insulin. The new combination is then put back into the bacteria, and the bacteria are put into the fermentation tank to propagate and hence produce insulin. When the present invention is used to irradiate the bacteria directly, or to make a bio-spectrum fermentation tank, the rate of successful DNA recombination, transplantation, and bacteria propagation can be increased, leading to the increase of insulin yield. This method can also be

applied to synthesizing hormones and antibiotics.

Example 25-3. Construction of New Organic Tissue

5 When the gene recombination transplantation technique assisted by the apparatus of example 25-1 is applied to plants or animals, the speed of growth is accelerated, fruits of crops become larger, the crops are cold, pest, and drought resistant, the body weight and disease resistance of animals are increased. When using the present invention, the rate of successful gene recombination transplantation in plants or animals is increased because the present invention is capable of influencing the arrangement and amount of DNA. The method of
10 the present invention can be used to directly irradiate the cells or embryos after recombination of genes.

Example 26. Plastics and Textiles Which Can Radiate Simulated

Bio-spectrum.

15 In order for the present invention to be applied widely, one or more monomers or compounds of chemical elements which can generate simulated bio-spectrum can be mixed with raw materials to make various kinds of plastics or textiles. The constituents that should be added are as follows:

20	zinc oxide ≥ 5%	ferric oxide ≥ 3%
	silicon oxide ≥ 5%	germanium oxide ≥ 10%
25	thorium oxide ≥ 2%	chromium oxide ≥ 75%

The chemical elements of this example can be mixed into the raw material of plastics directly, into paints, dyes, enamels, or other coating materials which will be painted onto the surface of the plastics products. They can also be mixed into the textiles (cloth, artificial leather) to form a radiating surface membrane.

30 The plastics or textiles which can radiate simulated bio-spectrum can be used for health care of human body or animals, for crop breeding or seedling nursing as well as for microbiologic fermentation. The applications of the materials using different sources of energy are now described.

1. Electricity as Energy Source

35 Electric wires of certain resistance are embedded into plastics or textiles that contain the simulated bio-spectrum generating substances as described in example 26. The electric wires are designed to have certain heat generating power and cross sectional area like that used in the electric heating blanket. When being heated by electricity, this kind of plastic or textile can generate simulated bio-spectrum of certain intensity, which
40 can enhance body fluid circulation and improve the function of the nervous system. It is beneficial to health when used for a long time. This kind of material can be made into electric heating blankets, local health bands, chair cushions for offices, cars, boats, or airplanes, mattresses, beds for home use, and sporting goods. The heating temperature is controlled below 45°C.

45 2. Magnetic Field as Energy Source

Magnetic material can be added into the plastic or textile containing substances that generate the simulated bio-spectrum as described in example 26. The magnetic material can be various kinds of permanent magnets. Under the action of the magnetic field, the simulated bio-spectrum generated by the plastic or textile
50 can be intensified. The dual action of the spectrum and magnetic field can enhance body fluid circulation and health care. This example can be used to make various kinds of mattresses or chair cushions, hats, and shoes, waist or knee bands, or to wrap strong magnetic materials to make various kinds of magneto-spectral health caring equipments.

55 3. Solar Energy as Heating Energy

Plastics or textiles, including plastic membrane, containing the simulated bio-spectrum generating substances as described in example 26 can be used to make large tents or rooms so that the plastics or textiles

can be heated by solar energy and become the simulated bio-spectrum generator. This example can be used for seedling nursing, breeding, or low temperature culturing.

4. Body Heat or Ambient Heat as Energy Source

The plastics or textiles containing simulated bio-spectrum generating substances as described in example 26 can be used to make articles for daily use such as shoes, caps, waist bands, mattresses or cushions, so that heat produced by human body or natural heat of the environment can act as the energy source. Long term contact with such articles will assist blood circulation and heat preservation.

The chemical constituents contained in the simulated bio-spectrum generator of the present invention have been described by way of examples. In practical use, these chemical constituents can be adjusted appropriately. For example, the oxides can be substituted with fluorides, carbides, or nitrides. The mixture ratio of these constituents can also be readjusted, but at least one or a few of the elements in Table 1 or their compounds should be contained. When any one of the following elements or its compounds serves as the main constituent, it should account for no less than 50%:

chromium, magnesium, selenium, germanium, zinc, copper, aluminum, strontium, cerium, yttrium, calcium, zirconium, molybdenum, silicon, iron, vanadium.

The simulated bio-frequency spectrum generator of the present invention can also contain the radiation source of gray body or near black body which consists of a plurality of ceramics, metals, or the combination of ceramic and metals.

The principle of determining the proportions of the above chemical constituent of determining radiation sources of the gray body or near black body mentioned above is that their spectrum should be as similar to the spectrum of the subject organism as possible. That is to say, the simulated bio-spectrum should overlap with the bio-spectrum; the more the overlap, the better. For complicated organisms such as human beings or animals, the spectrum to be simulated with the constituents in certain proportions should be as broad as possible. It is preferable to cover ultraviolet, visible light, infrared through millimeter waves, so that sufficient transitions of the molecules, atoms, and electrons can be elicited simultaneously.

The applicant finds whatever the proportions of the chemical elements may be, the key point is whether the spectral signal generated by the simulated bio-spectrum generator and the energy elicited by the electrons or the excited molecules can be utilized to achieve biological effects of beneficial regulation. A spectral range of 0.2 μm - 10 cm covers most of the bio-spectrum. A means for effectively adjusting and improving the development and survival of living organisms is provided through the application of the method and apparatus of the present invention. Many kinds of diseases can be treated with the apparatus of the present invention.

5 Table B. Functions and Therapeutic Effects of the Apparatus
 of the Present Invention

	Diseases	sites of Min. / treatment	time	times / day	days / course	therapeutic effects
10	common cold	face, ver- tebrae, undersides of feet	20-60	1-4	1-6	early stage: good; middle or late stage: fair effective rate \geq 70%
15	German measles	lesion	20-40	1-4	1-10	relief of itching \geq 70%
20	hepatitis	liver region, back, undersides of feet	20-60	1-3	30-150	effective rate \geq 80%
25	dysentery	abdomen, undersides of feet	20-50	1-4	1-10	e.r. \geq 80%
	acute or chronic bronchitis	lungs, bronchus, back	20-60	1-2	3-30	e.r. \geq 60%
30	asthma	lungs, bronchus, back	20-60	1-3	30-90	e.r. \geq 60%
35	pneumonia	lungs, bronchus, back	20-60	1-3	2-7	e.r. \geq 80%
	rheumatic fever	lungs, bronchus, back	20-50	1-2	10-20	remission rate \geq 40%
40	rheumatic heart disease	chest, joint	20-50	1-2	10-60	r.r. \geq 60%
45	hypertension	chest,	20-40	1-2	30	effective

5		vertebra, head, undersides of feet				rate ≥ 90%
10	coronary heart disease	chest, head, feet	20-40	1-2	30	e.r. ≥ 90%
	viral myocarditis	chest, head, feet	20-40	1-2	30	e.r. ≥ 85%
15	Raynaud's disease	chest, head, feet	20-40	1-2	30	e.r. ≥ 70%
	arrhythmia	chest, head, feet	20-40	1-2	5-30	e.r. ≥ 70%
20	heart failure	chest, head, feet	20-40	1-2	5-30	e.r. ≥ 80%
	acute and chronic gastritis	gastric region, abdomen	20-40	1-2	5-30	e.r. ≥ 85%
25	peptic ulcer	gastric region, abdomen	20-40	1-2	30	e.r. ≥ 90%
30	chronic colitis	gastric region, abdomen	20-40	1-2	30	e.r. ≥ 90%
35	cirrhosis of liver	liver, abdomen, back, feet	20-40	1-3	30	e.r. ≥ 70%
	acute and chronic pancreatitis	lesion, abdomen, lumbar region	20-40	1-3	2-30	e.r. ≥ 65%
40	gastro- enteric neurosis	stomach, abdomen, undersides of feet	20-60	1-3	3-30	e.r. ≥ 70%
45						
	leukemia	whole body, chest,	20-60	1-3	30-90	e.r. ≥ 30%
50						
55						

5		spleen, abdomen, vertebra, feet					
	diabetes	region of islets of Langerhans abdomen, lumbar region, feet	20-60	1-3	3-90	e.r. ≥	60%
10							
	disturbance of acid base equilibrium	chest, abdomen, vertebra, feet	20-60	1-3	5-30	e.r. ≥	60%
15							
	obesity	abdomen, back, feet	20-60	1-3	30	remission rate ≥	60%
20	malnutrition	abdomen, stomach, kidney region, feet	20-60	1-3	5-30	r.r. ≥	50%
25	beri-beri	lesion	20-60	1-3	7-30	r.r. ≥	60%
	nephrosis syndrome	kidney region, feet, abdomen, whole body	20-60	1-3	30	r.r. ≥	75%
30							
	uremia	kidney region, feet, abdomen, whole body	20-60	1-3	30	r.r. ≥	60%
35							
	alcoholism	liver, abdomen, stomach, whole body	20-60	1-3	5-30	effective rate ≥	65%
40							
	narcotics abstinence	head, feet abdomen, stomach, whole body	20-60	1	30	e.r. ≥	65%
45							
	food poisoning	liver, abdomen,	60	1-3	1-7	e.r. ≥	70%
50							
55							

5		stomach, whole body					
	remission of radiation sickness	whole body	60	1-2	30	e.r. ≥	65%
10	intensif- ication of anesthesia	site of injection of anesthetics	5-20	1	1	e.r. ≥	70%
	sedation	head, feet abdomen	20-60	1-2	1-10	e.r. ≥	80%
15	hypnogenesis	head, feet, stomach, abdomen	20-50	1	30	e.r. ≥	70%
20	analgesia	lesion	20-60	1-3	30	e.r. ≥	80%
	closed wound	wound	20-40	1-2	2-10	e.r. ≥	85%
	open wound	wound	20-40	1-3	2-10	e.r. ≥	90%
25	quick healing of surgical wound	wound	20-40	1-3	3-5	e.r. ≥	90%
	burns	lesion	20-40	1-3	3-5	e.r. ≥	90%
30	frostbite	lesion	20-40	1-3	3-5	e.r. ≥	90%
	poisonous snake bite	lesion	60	1-3	10	e.r. ≥	80%
35	pyemia	lesion	30-50	1-3	10	e.r. ≥	80%
	furuncle	lesion	30-50	1-3	3-10	e.r. ≥	80%
	carbuncle	lesion	30-50	1-3	3-10	e.r. ≥	85%
40	cellulitis	lesion	30-50	1-3	3-10	e.r. ≥	85%
	lymphangioitis	lesion	30-50	1-3	3-10	e.r. ≥	85%
	erysipelas	lesion	30-50	1-3	3-10	e.r. ≥	85%
45	paronychia	lesion	30-50	1-3	2-8	e.r. ≥	85%
	peritendinitis	lesion	30-50	1-2	30	e.r. ≥	60%
	bone tumors	whole body	20-60	1-3	5-30	remission	

50

55

5		lesion, with healing of surgical wound				
10	damage of peripheral nerves	lesion	20-40	1-3	10-30	effective rate \geq 60%
15	difficulty in urination	perinium, abdomen, kidney region	20-40	1-3	5-20	e.r. \geq 60%
20	retention of urine	perinium, abdomen, kidney region	20-40	1-3	5-20	e.r. \geq 60%
25	swelling of scrotum	lesion	20-40	1-3	5-30	e.r. \geq 60%
30	cyctitis	perinium, bladder	20-40	1-3	5-30	e.r. \geq 70%
35	prostatitis	perinium, lower abdomen	20-40	1-3	5-30	e.r. \geq 80%
40	renal hyper- tension	kidney region, feet, whole body	20-40	1-3	30-60	e.r. \geq 80%
45	anti-inflam- mation and analgesia of gall stone and kidney stone	lesion	20-40	1-3	3-15	remission
50	infertility or sterility	whole body, perinium, abdomen, uterus, feet, verte- brae	20-40	1-3	5-30	effective rate \geq 60%
55	disturbance in sexual	whole body, perinium,	20-40	1-3	5-30	e.r. \geq 60%

5	function						
	care of premature infant	whole body	15-60	1-3	3-20	e.r. ≥	60%
10	hepatitis accompanied by pregnancy	whole body, 20-40 liver region, feet		1-2	20-80	e.r. ≥	60%
	puerperal infection	lesion	20-40	1-3	5-15	e.r. ≥	70%
15	cervicitis	lesion	20-40	1-3	30	e.r. ≥	85%
	vaginitis	lesion	20-40	1-3	5-30	e.r. ≥	85%
20	pelvic infection	perinium	20-40	1-3	30	e.r. ≥	85%
	metropathia hemorrhagica	perinium, uterine projection area	20-40	1-3	30	remission	
25	lactation menopause syndrome	lesion, feet, abdomen	20-40	1-3	5-30	effective rate ≥	70%
30	premenstrual anxiety	abdomen, feet	20-40	1-3	5-30	e.r. ≥	90%
	climateric syndrome	whole body	20-40	1-3	30	e.r. ≥	45%
35	menopause	whole body, abdomen	20-40	1-3	30	e.r. ≥	50%
	menorrhagia	abdomen	20-40	1-3	30	e.r. ≥	50%
40	breast tumor	lesion, whole body	30-60	1-2	30	remission	
	gas gangrene	lesion	40	1-3	10	remission	
	mastitis	lesion	30-50	1-2	2-10	effective rate ≥	70%
45							
	proliferation of lobuli	lesion	30-50	1-2	30	e.r. ≥	70%
50							
55							

5	mammae						
	hernia	lesion	30-50	1-2	30	e.r. ≥	60%
	peritonitis	lesion	30-50	1-2	30	e.r. ≥	70%
10	fistula or abscess of anus or intestine	lesion	30-50	1-2	30	e.r. ≥	90%
	fissura ani	lesion	30-50	1-2	2-20	e.r. ≥	90%
15	hemorrhoid	lesion	30-50	1-2	2-20	e.r. ≥	90%
	cholecystitis	lesion	30-50	1-2	2-20	e.r. ≥	70%
	angiitis	lesion	30-50	1-2	30	e.r. ≥	30%
20	varicose of vein of lower extremity	lesion	30-50	1-2	30	remission	
25	chronic ulcer cruris	lesion	30-50	1-2	30	effective rate ≥	80%
	quick healing of plastic operation	lesion	20-40	1-2	2-7	e.r. ≥	95%
30	elimination of repelling reaction	lesion	20-60	1-3	2-10	e.r. ≥	95%
	quick healing of fracture	lesion	20-60	1-3	2-10	e.r. ≥	85%
35	damage of meniscus	lesion	20-60	1-3	5-20	e.r. ≥	75%
40	enhancement of healing of replantation of extremities	lesion	20-60	1-3	3-10	e.r. ≥	95%
	purulent osteomyelitis	lesion	20-60	1-3	20-40	e.r. ≥	80%
45	rheumatoid arthritis	lesion	20-60	1-3	30-60	e.r. ≥	80%
	arthritis	lesion	20-60	1-3	30-60	e.r. ≥	90%

50

55

5	osteoporosis	lesion, whole body	20-60	1-3	30-60	e.r. ≥ 70%
	sequelae	lesion	20-60	1-3	30-60	remission
10	pain in neck, shoulder, or lumbar region	lesion	20-60	1-3	3-30	effective rate ≥ 95%
	periarthrititis of shoulder joint	lesion	20-60	1-3	3-30	e.r. ≥ 95%
15	epichodylitis of humerus	lesion	20-60	1-3	3-30	e.r. ≥ 95%
	vomiting of infant	stomach, abdomen	15-20	1-2	5	e.r. ≥ 90%
20	scleroderma neonatorum	abdomen, perinium	15-20	1-2	5	e.r. ≥ 90%
	subcutaneous gangrene of newborn infant	lesion	15-20	1-2	7	e.r. ≥ 80%
25	septicemia of newborn infant	whole body	15-20	1-2	7	remission
30	tetanus of newborn infant	whole body	15-30	1-2	10	remission
	hemolysis of newborn infant	whole body	15-30	1-2	10	remission
35	infantile diarrhea	abdomen	15-30	1-2	2-7	effective rate ≥ 90%
	inflammation infant buccal cavity	inside or outside of lesion	15-20	1	2-10	e.r. ≥ 70%
40	acute respiratory infection of infant	chest, accompanied with medic- ation	15-20	1	3-7	e.r. ≥ 95%
45	infantile pneumonia	chest, accompanied with medic-	15-20	1	3-7	e.r. ≥ 95%

50

55

5		ation				
	infantile nephrosis	kidney region, feet, whole body	15-30	1	10	e.r. ≥ 85%
10	infantile tuberculosis	chest, spleen region, feet	15-30	1	20	e.r. ≥ 70%
15	mild disturbance of cerebral function of infant	head, feet, 15-30 vertebrae	15-30	1	20	e.r. ≥ 70%
20	incontinence of urine	perinium, lumbar and kidney region	15-30	1-2	3-7	e.r. ≥ 95%
25	immuno- deficiency	whole body	15-30	1-2	20	remission
	paralysis	whole body	60	1-2	30	remission
	facial neuritis	face	30-50	1-2	3-15	effective rate ≥ 80%
30	trigeminal neuralgia	lesion	30-50	1-2	3-15	e.r. ≥ 85%
	sciatica	lesion	30-50	1-2	3-15	e.r. ≥ 85%
35	epilepsy	head, brain, feet, cervical vertebrae	30-50	1-2	3-30	e.r. ≥ 90%
40	sequelae of brain damage	lesion	30-50	1-2	3-30	e.r. ≥ 80%
	psychosis and hysteria	head, whole body	30-50	1-2	30	e.r. ≥ 70%
45						
	neurosis	head, vertebra, abdomen,	30-50	1-2	3-30	e.r. ≥ 70%
50						
55						

5		feet				
	neurasthenia	head, vertebra, abdomen, feet	30-50	1-2	3-30	e.r. ≥ 70%
10	hysteria	head, vertebra, abdomen, feet	30-50	1-2	3-30	e.r. ≥ 70%
15	schizophrenia	head, vertebra, abdomen, feet	30-50	1-2	3-30	e.r. ≥ 70%
20	senile dementia	brain, whole body	20-40	1-2	30	remission
	herpes simplex	lesion	20-40	1-3	5-10	effective rate ≥ 95%
25	herpes zoster	lesion	20-40	1-3	5-10	e.r. ≥ 95%
	pustule	lesion	20-40	1-3	5-10	e.r. ≥ 95%
	folliculitis	lesion	20-40	1-3	5-10	e.r. ≥ 95%
30	syphilis	lesion	30-60	1-2	30	remission
	tinea	lesion	30-60	1-2	10-30	effective rate ≥ 85%
35	coccidioido- mycosis	lesion	30-60	1-2	10-30	e.r. ≥ 85%
	aspergillosis	lesion	30-60	1-2	10-30	e.r. ≥ 90%
	scabies	lesion	30-60	1-2	10-30	e.r. ≥ 90%
40	allergic dermatitis, eczema	lesion	30-60	1-2	10-30	e.r. ≥ 90%
	pruritus	lesion	30-60	1-2	10-30	e.r. ≥ 90%
45	softening of corn	lesion	30-60	1-2	10-30	e.r. ≥ 90%
	actinic dermatitis	lesion	30-60	1-2	10-30	e.r. ≥ 80%

50

55

5	frostbite	lesion	30-60	1-2	2-7	e.r. ≥ 98%
	cold injury	lesion	30-60	1-2	2-7	e.r. ≥ 90%
	psoriasis	lesion	30-60	1-2	10-30	e.r. ≥ 80%
10	pityriasis rosea	lesion	30-60	1-2	10-30	e.r. ≥ 70%
	erythema multiforme	lesion	30-60	1-2	10-30	e.r. ≥ 90%
15	allergic noclular vasculitis of skin	lesion	30-60	1-2	10-30	e.r. ≥ 70%
20	Behcet's disease	lesion	30-60	1-2	30	e.r. ≥ 70%
	lupus erythematosus	lesion	30-60	1-2	30	remission
25	scleroderma	lesion	30-60	1-2	30	remission
	vittiligo	lesion	30-60	1-2	30	remission
	chloasma	lesion	30-60	1-2	30	effective rate ≥ 70%
30	acne	lesion	30-60	1-2	30	e.r. ≥ 70%
	dermatitis seborrhaeica	lesion	20-50	1-2	30	e.r. ≥ 80%
35	alopecia	lesion, accompanied with medic- ation	20-50	1-2	30	e.r. ≥ 85%
40	osmidrosis	axilla, whole body	20-50	1-2	30	remission
	anhylrosis	axilla, undersides of feet, whole body	20-50	1-2	30	remission
45	keloid	lesion	20-40	1-3	30	remission
	acute hemorrhagic	both eyes	20-40	1-3	1-7	effective rate ≥ 80%

50

55

5	conjunctivitis					
	ciliary blepharitis	lesion	20-40	1-3	5-30	e.r. \geq 90%
	conjunctivitis	lesion	20-40	1-3	3-15	e.r. \geq 90%
10	scleritis	lesion	20-40	1-2	5-20	e.r. \geq 60%
	glaucoma	lesion	20-40	1-2	30	remission
15	juvenile myopia	lesion	20-40	1-2	30	effective rate \geq 90%
	presbyopia	lesion	20-40	1-2	30	remission
	rhinitis	lesion	20-40	1-2	30	effective rate \geq 80%
20	atrophic and allergic sinusitis	lesion	20-40	1-2	30	e.r. \geq 80%
25	pharyngitis and laryngitis	lesion	20-40	1-2	30	e.r. \geq 80%
	tonsillitis	lesion	20-40	1-2	30	e.r. \geq 80%
	otitis media	lesion	20-40	1-2	5-30	e.r. \geq 85%
30	inflammation or furuncle of external auditory canal	lesion	20-40	1-2	3-10	e.r. \geq 85%
35	toothache, hemorrhage	lesion	20-40	1-2	3-20	e.r. \geq 70%
	pulpitis	lesion	20-40	1-2	30	e.r. \geq 60%
40	AIDS	whole body, chest, liver, abdomen, spleen, lymph, feet, head	30-60	1-3	30	e.r. \geq 80%
45	tumors	lesions, whole body	30-60	1-3	30	remission
50	protection	whole body	20-60	1-3	1-30	effective

	of radiation				rate \geq 75%
5	delay of senility	whole body	20-45	1-2	30 e.r. \geq 70%
	human health care	whole body	20-60	1-3	30 e.r. \geq 95%
10	elimination of fatigue, restoration of physical ability	kidney region, feet, abdomen, head	20-50	1-2	5-20 e.r. \geq 90%
15	thyroidism	thyroid region, abdomen, stomach, feet, liver, whole body	20-50	1-2	30 e.r. \geq 70%

Claims

1. A method for regulating and improving status of growth and survival of the living organisms comprising the steps of:
 - a) detecting and measuring the inherent bio-frequency spectrum signals of said organisms;
 - b) simulating said inherent bio-frequency spectrum signals and generating simulated bio-frequency spectrum signals identical, similar, or partially similar to the inherent bio-frequency spectrum signals;
 - c) applying said simulated bio-spectrum signals to said organism to elicit transition of energy levels of the elementary mass particles (molecules, atoms, electrons) to cause resonance of the elementary mass particles and generation of thermal or non-thermal biological effects on organs, tissues, blood and the nervous system, thereby to enhance biological growth and improve the status of the cells, said biological effects performing the function of negative feedback (bi-directional regulation) conducive to maintaining the status of equilibrium of the organism.
2. The method according to claim 1, wherein said simulated bio-frequency spectrum signals are broad-band signals of comprehensive physical field, the wavelengths thereof are from micrometers (0.2 μm) to centimeters (10 cm); and wherein the intensity of said simulated signals is weak within the range of 50 μm - 10 cm and of the same order of magnitude as the intensity of the bio-spectrum signals in that range.
3. The method according to claim 1, wherein regulating and improving growth and survival of the living organisms means treating diseases of and health care for human beings and animals; regulating breeding, growth and development of plants and fermentation and development of microorganisms.
4. The method according to claims 1 and 2, wherein the simulated bio-frequency spectrum signals applied to the living organisms are a portion of the signals in said broad-band (from micrometer to centimeter).
5. The method according to claim 1, wherein said simulated bio-frequency spectrum signals are generated in steps of:
 - a) analyzing the physical and chemical properties and the inherent spectrum of the living organisms to be regulated and controlled;
 - b) selecting one or a plurality of chemical elements according to the physical and chemical properties and the inherent spectrum of said organisms to prepare a simulated bio-frequency spectrum generating device;
 - c) exciting said chemical elements by an energy generating means thereby to produce the simulated bio-frequency spectrum signals identical, similar, or partially similar to the inherent spectrum signals

of the organism.

6. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises one or a plurality of chemical elements and their compounds listed in Table A, and wherein when one of the following elements and its compounds is taken as the main constituent, its content should be no less than 50%: chromium, magnesium, selenium, iron, germanium, zinc, copper, manganese, aluminum, strontium, cerium, yttrium, calcium, zirconium, titanium, cobalt, vanadium molybdenum, silicon.

7. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

chromium oxide \geq 95%

selenium oxide \geq 1%

chromium \geq 0.8%

germanium oxide \geq 0.8%

zinc oxide \geq 0.5%

ferric oxide \geq 0.5%

copper oxide \geq 0.1%

cobalt oxide \geq 0.1%

manganese oxide \geq 0.1%

molybdenum oxide \geq 0.1%

aluminum oxide \geq 0.1%

silicon oxide \geq 0.1%

lanthanum \geq 0.1%

magnesium fluoride \geq 0.1%

8. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

chromium oxide \geq 95%

ferric oxide \geq 0.5%

chromium \geq 0.8%

zinc oxide \geq 0.4%

copper oxide \geq 0.1%

cobalt oxide \geq 0.1%

manganese oxide \geq 0.1%

molybdenum \geq 0.1%

selenium oxide \geq 0.7%

strontium oxide \geq 0.1%

vanadium oxide \geq 0.1%

aluminum oxide \geq 0.1%

magnesium oxide \geq 0.1%

silicon oxide \geq 0.1%

germanium oxide \geq 0.8%

lanthanum \geq 0.1%

boron oxide \geq 0.1%

magnesium fluoride \geq 0.1%

9. The method to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

chromium oxide \geq 93%

chromium \geq 0.8%

5 copper oxide \geq 0.1%

manganese oxide \geq 0.1%

10

strontium oxide \geq 0.1%

15

strontium oxide \geq 0.1%

silicon oxide \geq 0.1%

20 lanthanum \geq 0.1%

ferric oxide \geq 0.5%

zinc oxide \geq 0.8%

cobalt oxide \geq 0.1%

molybdenum oxide \geq 0.1%

vanadium oxide \geq 0.1%

magnesium oxide \geq 0.1%

germanium oxide \geq 1%

magnesium fluoride \geq 0.1%

and suitable amounts of elements like lithium, potassium, or titanium (each less than 0.2%).

25 10. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

30 chromium oxide \geq 94%

chromium \geq 0.8%

copper oxide \geq 0.2%

35 manganese oxide \geq 0.3%

iodine oxide \geq 0.9%

0.1%

40 vanadium oxide \geq 0.1%

magnesium oxide \geq 0.1%

germanium oxide \geq 0.8%

45 CaCO_3 \geq 0.1%

ferric oxide \geq 0.5%

zinc oxide \geq 0.7%

cobalt oxide \geq 0.2%

molybdenum oxide \geq 0.1%

strontium oxide \geq

aluminum oxide \geq 0.1%

silicon oxide \geq 0.1%

lanthanum \geq 0.1%

50 11. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

chromium oxide \geq 94%

ferric oxide \geq 0.5%

55

chromium \geq 0.8%	zinc oxide \geq 0.8%
copper oxide \geq 0.2%	cobalt oxide \geq 0.2%
5 manganese oxide \geq 0.3%	molybdenum oxide \geq 0.1%
selenium oxide \geq 0.9%	strontium oxide \geq 0.1%
10 vanadium oxide \geq 0.1%	aluminum oxide \geq 0.1%
magnesium oxide \geq 0.8%	lanthanum oxide \geq 0.1%
KI \geq 0.1%	barium oxide \geq 0.1%
15 CaCO_3 \geq 0.1%	magnesium fluoride \geq 0.1%

12. The method according to 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

chromium oxide \geq 94%	ferric oxide \geq 0.5%
chromium \geq 0.8%	zinc oxide \geq 0.5%
25 copper oxide \geq 0.1%	cobalt oxide \geq 0.1%
manganese oxide \geq 0.1%	molybdenum oxide \geq 0.1%
selenium oxide \geq 0.9%	strontium oxide \geq 0.1%
30 vanadium oxide \geq 0.1%	aluminum oxide \geq 0.1%
magnesium oxide \geq 0.1%	silicon oxide \geq 0.1%
35 germanium oxide \geq 0.8%	lanthanum \geq 0.1%

and a small amount of metallic elements like lithium, potassium, and sodium not more than 0.5%.

40 13. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

45

50

55

chromium oxide \geq 92%	ferric oxide \geq 0.5%
chromium \geq 0.8%	zinc oxide \geq 0.7%
copper oxide \geq 0.1%	cobalt oxide \geq 0.1%
manganese oxide \geq 0.2%	molybdenum oxide \geq 1%
selenium oxide \geq 1%	strontium oxide \geq
0.1%	
vanadium oxide \geq 0.1%	aluminum oxide \geq 0.1%
magnesium oxide \geq 1%	silicon oxide \geq 0.1%
germanium oxide \geq 1%	lanthanum oxide \geq 0.1%
KI \geq 0.1%	

20

and suitable amounts of elements not more than 0.2% for each element like titanium, boron.

14. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

25

chromium oxide \geq 90%	ferric oxide \geq 1%
chromium \geq 1%	zinc oxide \geq 1%
copper oxide \geq 0.2%	cobalt oxide \geq 0.2%
manganese oxide \geq 0.5%	molybdenum oxide \geq 0.1%
selenium oxide \geq 1.5%	strontium oxide \geq 0.1%
vanadium oxide \geq 0.1%	aluminum oxide \geq 0.2%
magnesium oxide \geq 0.8%	silicon oxide \geq 0.3%
germanium oxide 1%	lanthanum \geq 0.1%
KI \geq 0.1%	

40

45

15. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

50

55

selenium oxide \geq 5%

silicon oxide \geq 50%

5

serium oxide \geq 5%

boron nitride \geq 10%

10

tungsten carbide \geq 3%

germanium oxide \geq 5%

thorium oxide \geq 4%

zirconium oxide \geq 15%

titanium oxide \geq 3%

platinum \geq 0.01%

16. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

15

aluminum oxide \geq 85%

ferric oxide \geq 3%

cobalt oxide \geq 2%

titanium oxide \geq 3%

20

silicon oxide \geq 3%

hafnium oxide \geq 2%

platinum \geq 0.01%

25

17. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

yttrium oxide \geq 5%

ReCaMnFeOx \geq 88%

30

silicon oxide \geq 5%

18. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

35

chromium oxide \geq 95%

chromium \geq 1%

zinc oxide \geq 1%

cerium oxide \geq 1%

40

silicon oxide \geq 1%

19. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

45

titanium oxide \geq 90%

zirconium oxide \geq 5%

silicon oxide \geq 1%

ferric oxide \geq 1.5%

50

zinc oxide \geq 1%

copper oxide \geq 1%

beryllium oxide \geq 0.5%

55

20. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

silicon carbide monomer (high purity) \geq 90%

chromium \geq 2%

zinc oxide \geq 1%

5

ferric oxide \geq 1%

- 10 21. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

ferric oxide \geq 20%

zirconium oxide \geq 75%

15

silicon oxide \geq 2%

zinc oxide \geq 1%

niobium oxide \geq 2%

- 20 22. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

silicon oxide \geq 80%

ferric oxide \geq 2%

25

vanadium oxide \geq 2%

zinc oxide \geq 2%

titanium oxide \geq 2%

boron nitride \geq 2%

tungsten carbide \geq 1%

magnesium oxide \geq 2%

30

calcium oxide \geq 5%

cerium oxide \geq 2%

- 35 23. The method according to claim 5, wherein said simulated bio-frequency spectrum generating device comprises the following constituents:

aluminum oxide \geq 80%

cerium oxide \geq 1%

ferric oxide \geq 5%

cobalt oxide \geq 3%

40

chromium oxide \geq 5%

silicon oxide \geq 1%

- 45 24. The method according to claim 1, wherein said organisms are human beings, the intensity of said simulated bio-frequency spectrum signals applied to the human body is determined by the comfortable feeling of the human beings the duration is no less than five minutes each time.

- 50 25. The method according to claim 1, wherein said organisms are animals, the intensity of said simulated bio-frequency spectrum signals applied to the surface of the animal skin is 5 - 30 mW/cm², and the duration is no less than five minutes each time.

26. The method according to claim 1, wherein said organisms are plants or microbes, the intensity of said simulated bio-frequency spectrum signals applied to the surface of the plants of microbes is 5 - 20 mW/cm² and the duration is no less than five minutes each time.

- 55 27. The method according to claim 1, wherein said organisms are human beings, the application of the simulated bio-frequency spectrum together with medications administered internally or externally or with other physical therapies or with acupuncture therapy can increase the therapeutic effects.

28. The method according to claim 1, wherein the working temperature of said simulated bio-frequency spectrum generator will be higher than or equal to the body temperature of the organisms.
- 5 29. The method according to claims 1 and 3, wherein regulating and improving status of survival of human beings means treating AIDS, hepatitis, tumors, epilepsy, herpes, cardiac or cerebral vascular diseases, rheumatoid or ether kinds of arthritis, diseases of the five senses, kidney, hemorrhoid, menorrhagia or other gynecologic diseases, respiratory diseases, gastro-intestinal diseases, chloasma, human health care, eliminating fatigue, enhancing recovery, protection of radiation, delay of senility, and enhancement of hair growth.
- 10 30. An apparatus for regulating and improving status of growth and survival of the living organisms comprising:
- 15 a) Energy generating means;
- b) means for receiving the energy generated by said energy generating means and generating simulated bio-frequency spectrum signals identical, similar, or partially similar to the inherent bio-spectrum of said organisms;
- c) said simulated bio-frequency spectrum signal generating means comprising a plurality of elements and their compounds in the periodic table, which are capable of generating said simulated bio-frequency spectrum signals identical or similar to the inherent bio-spectrum of said organisms.
- 20 31. The apparatus according to claim 30, wherein said energy generating means is an electric power source.
32. The apparatus according to claims 30 and 31, wherein said simulated bio-frequency spectrum signal generating means comprises a non-metal substrate; a layer composed of a plurality of said elements and their compounds in the right proportion and plated onto the surface of said substrate, and an electrothermal converting means provided within said substrate.
- 25 33. The apparatus according to claims 30 and 31, wherein said simulated bio-frequency spectrum signal generating means comprises a non-metal substrate; a conducting membrane of metal oxides plated onto the surface of said substrate to form said electrothermal energy converting means; and a layer composed of a plurality of said elements and their compounds in the right proportion coated on the surface of said metal conducting membrane.
- 30 34. The apparatus according to claims 30 and 31, wherein said simulated bio-frequency spectrum signal generating means comprises a non-metal substrate containing therein a plurality of said chemical elements and their compounds in the right proportion and an electrothermal energy converting means.
- 35 35. The apparatus according to claims 30 and 31, wherein said simulated bio-frequency spectrum signal generating means comprises a non-metal substrate containing therein a plurality of said chemical elements and their compounds in the right proportion, and electrically conducting substances for converting electrical energy to thermal energy.
- 40 36. The apparatus according to claims 30 and 31, wherein said simulated bio-frequency spectrum signal generating means comprises a metal substrate, a layer composed of a plurality of chemical elements and their compounds and plated directly onto the surface of the substrate or coated onto it in the form of enamel pulp; an electrothermal energy converting means provided within said substrate.
- 45 37. The apparatus according to claim 30 and 31, wherein said simulated bio-frequency spectrum signal generating means comprises a substrate made from high temperature resistant glass containing therein a plurality of chemical elements and their compounds in the right proportion, a layer of electrically conducting membrane made from metal oxides and formed on the surface of the substrate for converting electrical energy to thermal energy.
- 50 38. The apparatus according to claim 30, wherein said energy generating device is a source of magnetic field; and wherein said simulated bio-frequency spectrum signal generating means comprises a substrate made from magnetic material and a coating composed of one or a plurality of elements and their compounds in the right proportion and painted onto said substrate.
- 55 39. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating

means comprises therein one or a plurality of chemical elements in Table A and their compounds, and wherein when any of the following elements and their compounds is taken as the main constituent, its content should be no less than 50%: chromium, magnesium, selenium, germanium, zinc, copper, manganese, aluminum, strontium, cerium, yttrium, calcium, titanium, cobalt, vanadium, molybdenum, silicon, iron.

40. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

chromium oxide \geq 95%	selenium oxide \geq 1%
chromium \geq 0.8%	germanium oxide \geq 0.8%
zinc oxide \geq 0.5%	ferric oxide \geq 0.5%
magnesium oxide \geq 0.2%	copper oxide \geq 0.1%
cobalt oxide \geq 0.1%	manganese oxide \geq
0.1%	
molybdenum oxide \geq 0.1%	strontium oxide \geq 0.1%
vanadium oxide \geq 0.1%	aluminum oxide \geq 0.1%
silicon oxide \geq 0.1	lanthanum \geq 0.1%
	magnesium fluoride \geq 0.1%

41. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

chromium oxide \geq 95%	ferric oxide \geq 0.5%
chromium \geq 0.8%	zinc oxide \geq 0.4%
copper oxide \geq 0.1%	cobalt oxide \geq 0.1%
manganese oxide \geq 0.1%	molybdenum oxide \geq 0.1%
selenium oxide \geq 0.7%	strontium oxide \geq 0.1%
vanadium oxide \geq 0.1%	aluminum oxide \geq 0.1%
magnesium oxide \geq 0.1%	silicon oxide \geq 0.1%
chromium oxide \geq 0.8%	lanthanum \geq 0.1%
BO ₂ \geq 0.1%	MgF ₂ \geq 0.1%

42. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

	chromium oxide \geq 93%	ferric oxide \geq 0.5%
	chromium \geq 0.8%	zinc oxide \geq 0.5%
5	copper oxide \geq 0.1%	cobalt oxide \geq 0.1%
	manganese oxide \geq 0.1%	molybdenum oxide \geq 0.1%
10	selenium oxide \geq 1%	strontium oxide \geq
	0.1%	
15	vanadium oxide \geq 0.1%	aluminum oxide \geq 0.1%
	magnesium oxide \geq 0.1%	silicon oxide \geq 0.1%
	germanium oxide \geq 1%	lanthanum oxide \geq 0.1%
20	MgF ₂ \geq 0.1%	

and suitable amounts of elements like lithium, potassium, or titanium not more than 0.2% for each element.

- 25 43. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

30	chromium oxide \geq 94%	ferric oxide \geq 0.5%
	chromium \geq 0.8%	zinc oxide \geq 0.7%
	copper oxide \geq 0.2%	cobalt oxide \geq 0.2%
35	manganese oxide \geq 0.3%	molybdenum oxide \geq 0.1%
	selenium oxide \geq 0.9%	strontium oxide \geq 0.1%
	vanadium oxide \geq 0.1%	aluminum oxide \geq 0.1%
40	magnesium oxide \geq 0.1%	silicon oxide \geq 0.1%
	germanium oxide \geq 0.8%	lanthanum oxide \geq 0.1%
	CaCO ₃ \geq 0.1%	

45

44. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

50	chromium oxide \geq 94%	ferric oxide \geq 0.5%
----	---------------------------	--------------------------

55

chromium \geq 0.8%	zinc oxide \geq 0.5%
copper oxide \geq 0.2%	cobalt oxide \geq 0.2%
5 manganese oxide \geq 0.3%	molybdenum oxide \geq 0.1%
selenium oxide \geq 0.9%	strontium oxide \geq 0.1%
10 vanadium oxide \geq 0.1%	aluminum oxide \geq 0.1%
magnesium \geq 0.1%	silicon oxide \geq 0.1%
germanium oxide \geq 0.8%	lanthanum oxide \geq 0.1%
15 KI \geq 0.1%	BO ₂ \geq 0.1%
CaCO ₃ \geq 0.1%	MgF ₂ \geq 0.1%

- 20 45. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

chromium oxide \geq 94%	ferric oxide \geq 0.5%
25 chromium \geq 0.8%	zinc oxide \geq 0.5%
copper oxide \geq 0.1%	cobalt oxide \geq 0.1%
30 manganese oxide \geq 0.1%	molybdenum oxide \geq 0.1%
selenium oxide \geq 0.9%	strontium oxide \geq 0.1%
vanadium oxide \geq 0.1%	aluminum oxide \geq 0.1%
35 magnesium oxide \geq 0.1%	silicon oxide \geq 0.1%
germanium oxide \geq 0.8%	lanthanum oxide \geq 0.1%

40 and a small amount of metallic elements like lithium, potassium, or sodium not more than 0.5%.

46. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

45

50

55

chromium oxide \geq 92%	ferric oxide \geq 0.5%
chromium \geq 0.8%	zinc oxide \geq 0.5%
5 copper oxide \geq 0.1%	cobalt oxide \geq 0.1%
manganese oxide \geq 0.2%	molybdenum oxide \geq 1%
10 selenium oxide \geq 1%	strontium oxide \geq
0.1%	
vanadium oxide \geq 0.1%	lanthanum \geq 0.1%
15 KI \geq 0.1%	

and a suitable amount of elements like titanium or boron, each of which is not more than 0.2%.

20 47. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

25 chromium oxide \geq 90%	ferric oxide \geq 1%
chromium \geq 1%	zinc oxide \geq 1%
copper oxide \geq 0.2%	cobalt oxide \geq 0.2%
30 manganese oxide \geq 0.5%	molybdenum oxide \geq 0.1%
selenium oxide \geq 1.5%	strontium oxide \geq 0.1%
vanadium oxide \geq 0.1%	aluminum oxide \geq 0.2%
35 magnesium oxide \geq 0.8%	silicon oxide \geq 0.3%
germanium oxide \geq 1%	lanthanum \geq 0.1%
40 KI \geq 0.1%	

45 48. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

50 selenium oxide \geq 5%	germanium oxide \geq 5%
silicon oxide \geq 50%	thorium oxide \geq 4%
cerium oxide \geq 5%	zirconium oxide \geq 15%
55 boron nitride \geq 10%	titanium carbide \geq 3%
tungsten carbide \geq 3%	platinum \geq 0.01%

49. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

5	aluminum oxide \geq 85%	ferric oxide \geq 3%
	cobalt oxide \geq 2%	titanium oxide \geq 3%
	silicon oxide \geq 3%	hafnium oxide \geq 2%
10	platinum \geq 0.01%	

50. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

15	yttrium oxide \geq 5%	ReCaMnFeOx \geq 88%
20	silicon oxide \geq 5%	

51. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

25	chromium oxide \geq 95%	chromium \geq 1%
	zinc oxide \geq 1%	silicon oxide \geq 1%
30	cerium oxide \geq 1%	

52. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

35	titanium oxide \geq 90%	zirconium oxide \geq 5%
	silicon oxide \geq 1%	ferric oxide \geq 1.5%
40	zinc oxide \geq 1%	copper oxide \geq 1%
	beryllium oxide \geq 0.5%	

53. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

45	ferric oxide \geq 20%	zirconium oxide \geq 75%
50	silicon oxide \geq 2%	zinc oxide \geq 1%
	niobium oxide \geq 2%	

54. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

	silicon oxide \geq 80%		ferric oxide \geq 2%
	vanadium oxide \geq 2%		zinc oxide \geq 2%
5	titanium oxide \geq 2%		boron nitride \geq 2%
	tungsten carbide \geq 1%		magnesium oxide \geq 2%
10	tungsten oxide \geq 5%		cerium oxide \geq 2%

55. The apparatus according to claim 30, wherein said simulated bio-frequency spectrum signal generating means comprises the following constituents:

15	aluminum oxide \geq 80%		cerium oxide \geq 1%
	ferric oxide \geq 5%		cobalt oxide \geq 3%
20	chromium oxide \geq 5%		silicon oxide \geq 1%

56. The apparatus according to claim 30, wherein the chromaticity of the surface of said simulated bio-spectrum generating means is high, and the color is mainly green, or may be any other colors.

25 57. The apparatus according to claim 30, wherein the volume of the simulated bio-frequency spectrum signal generating means is $\geq 1 \text{ mm}^3$.

58. The apparatus according to claim 30, wherein the power of the energy source except body heat and ambient heat for said simulated bio-frequency spectrum signal generating means is $\geq 10 \text{ mW}$.

30 59. The apparatus according to claim 30, wherein the range of regulation and improvement of human body is shown is Table B.

60. The apparatus according to claim 30, wherein the energy source is the body heat of the organisms or natural heat.

35 61. The apparatus according to claim 30, wherein solar energy is used to heat plastic products or plastic membrane containing a plurality of chemical elements and their compounds which can generate a simulate bio-frequency spectrum, and the simulated bio-frequency spectrum signal generating means.

40 62. The apparatus according to claim 30, wherein the frequency of the power supply of said simulated bio-frequency spectrum generating means is controlled to 0 - 60 cycles/minute to simulate the information of Qi-Gong and Yuga for training and inducing the biofeedback of Qi-Gong and Yuga and also for treatment of diseases.

45 63. The apparatus according to claim 30, wherein one or a plurality of chemical elements that can simulate or partially simulate the inherent bio-spectrum are mixed into plastic or textile materials to make plastic products, synthetic leathers or clothes which can be widely used in health care of human body, animals, seedling nursing of plants, fermentation of microorganisms, culture and growth of bacteria.

50 64. The apparatus according to claim 30, wherein the radiation source of the gray body or near black body which consists of one or a plurality of cermaics, metals, or the combination of cermaics and metals that can generate simulated or partially simulated the inherent bio-spectrum, and can be widely applied in health care of human body and animals, seedling nursing of plants, fermentation of microorganisms, culture and growth of bacteria.

55

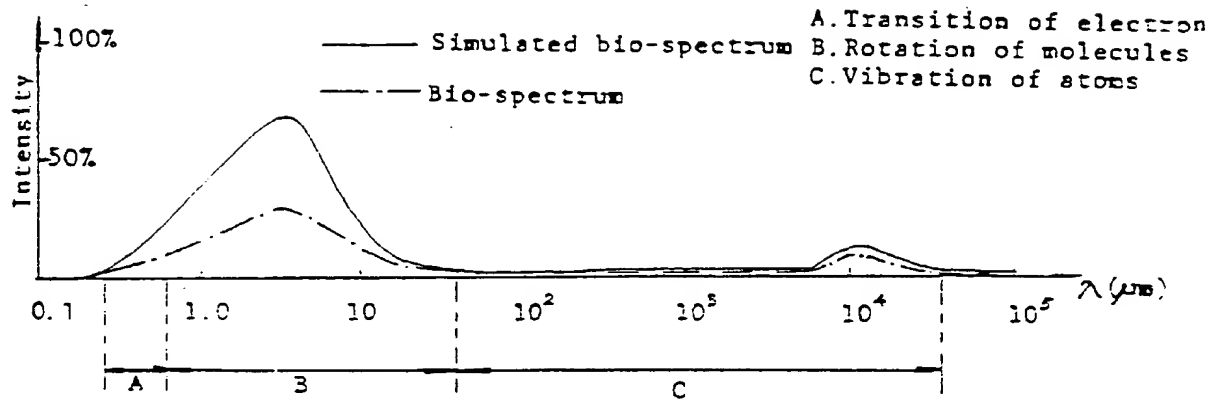


Fig. 1

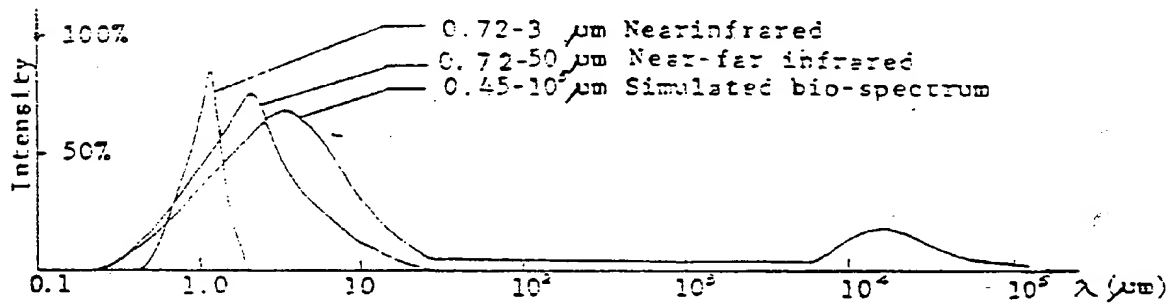


Fig. 2

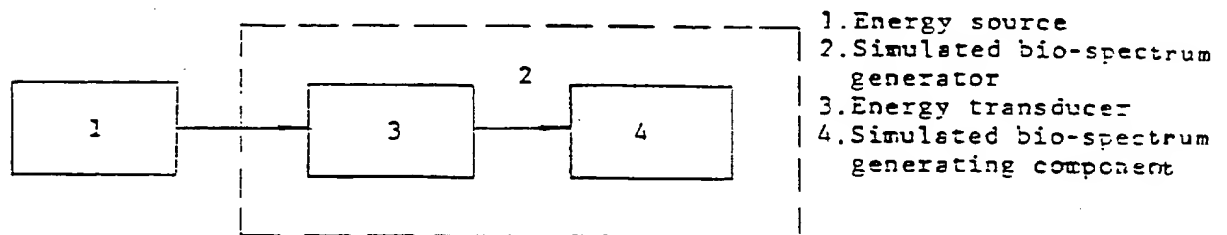


Fig. 3

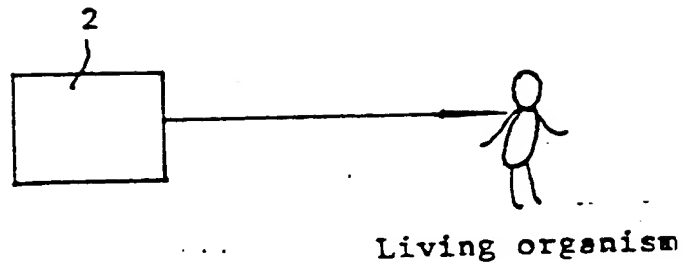


Fig. 5A

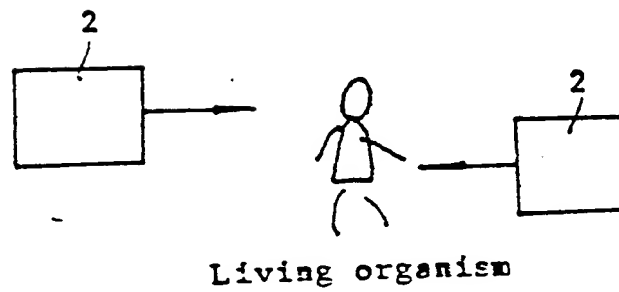


Fig. 5B




Fig. 5C

Fig. 5

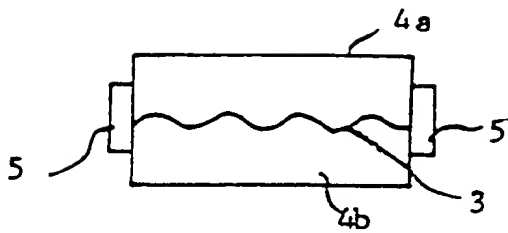


Fig. 4A-1

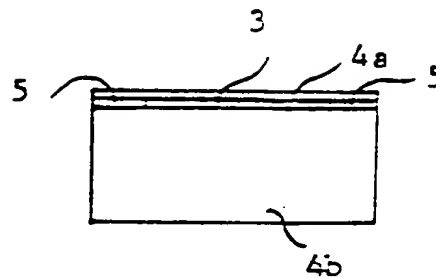


Fig. 4A-2

...

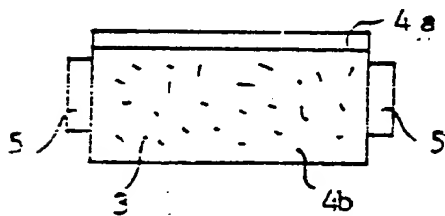


Fig. 4B-1

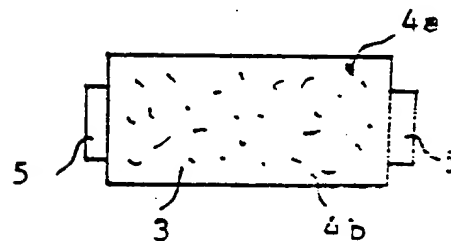


Fig. 4B-2

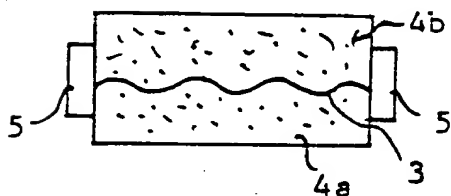


Fig. 4C-1

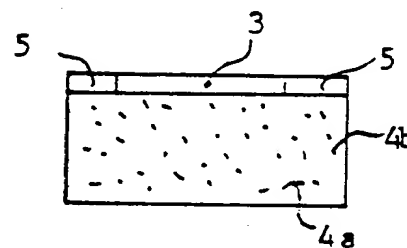


Fig. 4C-2

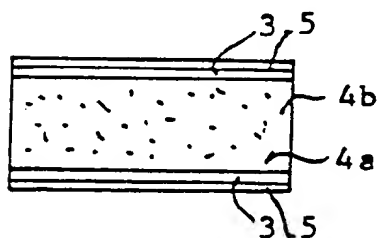


Fig. 4D

Fig. 4



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 92 40 2578

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
Y	DE-A-3 100 892 (L. MERSMANN) * abstract; figures * ---	1-4, 29-31	A61N5/06
Y	EP-A-0 291 569 (L. ZHOU ET AL.) * the whole document *	1-4, 29-31	
A	---	5-28, 32-64	
A	DE-A-3 300 517 (L. MERSMANN) * abstract; figures * ---	1,27, 29-31	
A	EP-A-0 164 836 (L.E. BADGLEY) * the whole document *	1	
A	DATABASE WPIL Week 8851, Derwent Publications Ltd., London, GB; AN 88-361160 & CN-85 107 113 (L. ZHOU ET AL.) * abstract * & CN 85107113 * figures *	1	
A	DATABASE WPIL Week 9113, Derwent Publications Ltd., London, GB; AN 91-092946 & SU-1 581 326 (M. YU GRIGOREV) * abstract *	1	A61N
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 11 NOVEMBER 1992	Examiner FERRIGNO A.
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 01.92 (P0401)